Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED HIGHBAY

TECHNICAL DATA

MODEL	VT-9-210-1
SKU	20331
WATTS	200W (Adjustable 100%-80%-60%)
LUMENS	32000LM
INPUT VOLTAGE	AC: 100-240V. 50/60hz
BEAM ANGLE	Adjustable 60°, 90°, 120°
LIFE SPAN	25,000 Hours
ON/OFF CYCLE	15,000 Times
CRI	>70
PF	>0.9
SAFETY CLASS	Class 1
MATERIAL	Aluminium
WIRE LENGTH	300mm
N.W (KGS)	2.29KGS/PC
MAX. MOUNTING HEIGHT	<5M
DIMENSION	Ø319x118m



3 IN 1 CCT & POWER CHANGING 120W/160W/200W

05 YEAR WARRANTY*

Lumen efficiency 160 LUMENS/W

IP65 RATING

*This product contains a light source of energy efficiency class<C>, where <C> shall be replaced by the energy class of the contained light source.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of the product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING


1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. Proper grounding should be ensured throughout the installation.
6. Terminal block not included.
7. To be connected with waterproof cable hose.
8. Replace any cracked protective shield.
9. Minimum distance from lighted objects 1m. 1M
10. For outdoor use.

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

This marking indicates that this product should not be disposed of with other household wastes.

Caution, risk of electric shock.




Replaceable (LED Only) Light source by a professional




INSTALLATION DIAGRAM

1



1.Switch OFF the power.

2




2.Confirm the angle, the arrow indicates the angle of the lighting fixture, and the angle rotation should not exceed 240°

3




3.If the angle is incorrect and the customer wants to adjust the angle, should unscrew the lens screws.

4

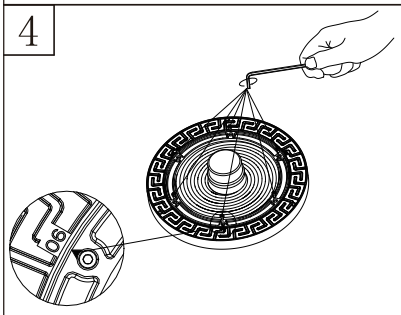


4. After adjusting the lens to the desired angle, tighten the lens screw and check if the lens sealing ring is flat.

5

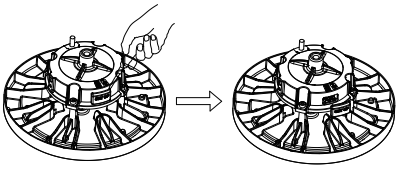


5. Open the rubber stopper on driver, to adjusting the power and CCT

6

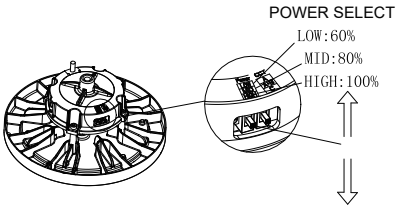


6. Adjust power by dialing up and down according to instructions

7

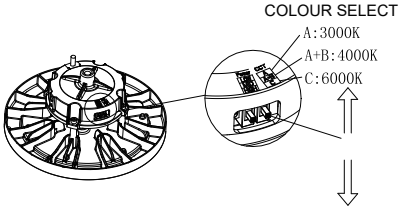


7. Adjust CCT by dialing up and down according to instructions

8



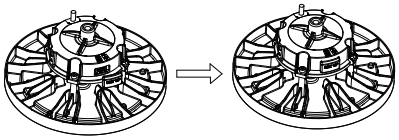


8.After adjusting the power and CCT, cover the power supply rubber ring tightly.

9



9.Install the ring on the lamp.

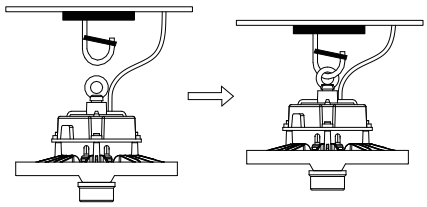10	11	12
		
10.Connect L,N and ⏚ Wires	11.Hang the light on a hook	12.Swith ON the power and test

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)



Note: Light source removal will void the warranty

VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

RoHS