Meaningful Innovation.

INSTRUCTION MANUAL

LED WATERPROOF FITTING





LINKABLE & QUICK CONNECT

IP65 RATING

02 YEAR WARRANTY*

TECHNICAL DATA

MODEL	SKU	WATTS	LUMEN @SPHERE 360	CRI	DF	BEAM ANGLE	LIFE SPAN [HOURS]	ON/OFF CYCLE [TIMES]	INPUT POWER	MATERIAL	DIMENSION	MAX CONNECT-ABLE UNITS
VT-80060	23087 23088	18W	1900Lm	≥80	≥0.7	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	600x59x47mm	20 pcs
VT-80120	23083 23084	36W	3900Lm	≥80	≥0.9	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	1200x59x47mm	10pcs
VT-80150	23085 23086	48W	5200Lm	≥80	≥0.9	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	1500x59x47mm	8pcs

These products are rated with IK05

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

MULTI-LANGUAGE MANUAL QR CODE


Please scan the QR code to access the manual in multiple languages.



IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

WARNING


1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. The control gear of this luminaire is a non-replaceable component; when the control gear reaches its end of life the whole luminaire shall be replaced.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
6. Must be connected to waterproof terminal box.
7. For indoor use and outdoor use.




Caution, risk of electric shock.




This marking indicates that this product should not be disposed of with other household wastes.

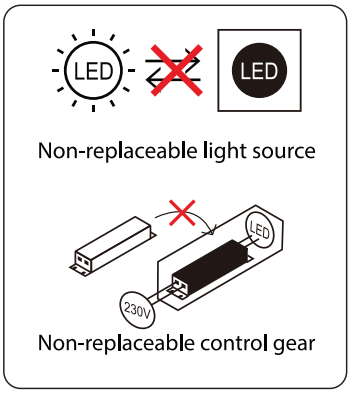



INSTALLATION DIAGRAM

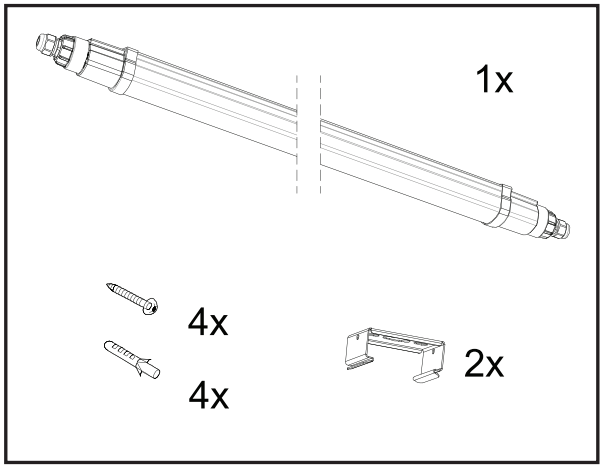

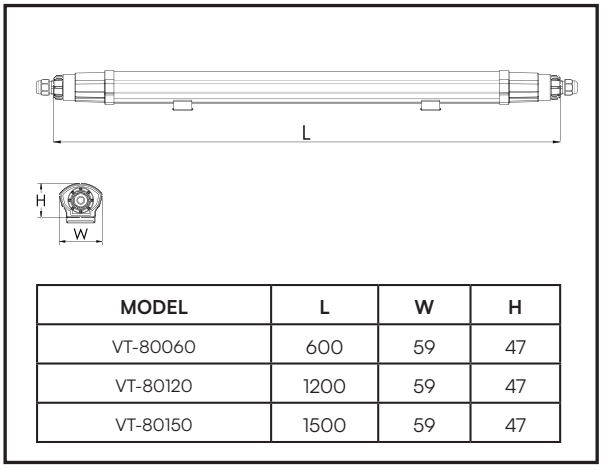


MODEL	L	W	H
VT-80060	600	59	47
VT-80120	1200	59	47
VT-80150	1500	59	47

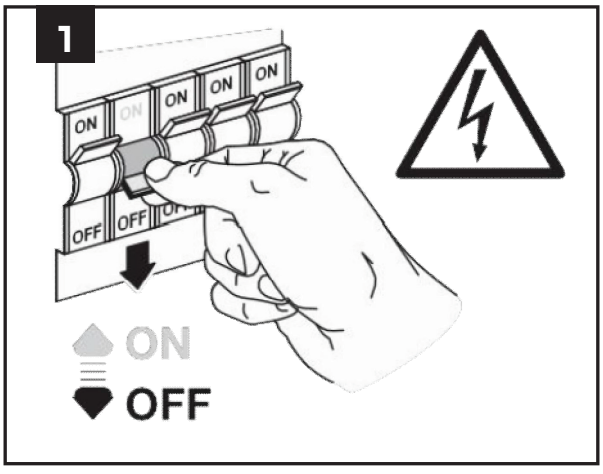

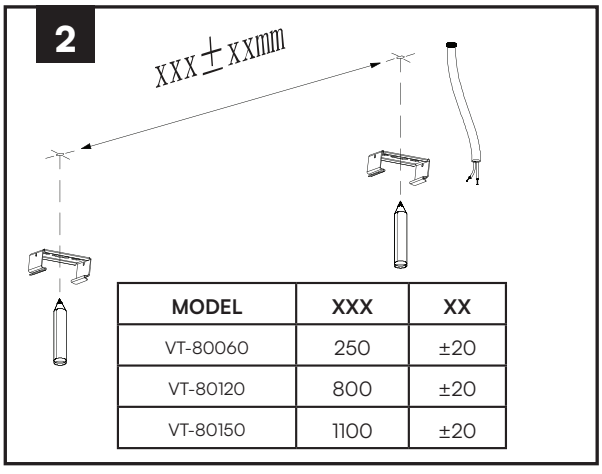


MODEL	XXX	XX
VT-80060	250	±20
VT-80120	800	±20
VT-80150	1100	±20


3

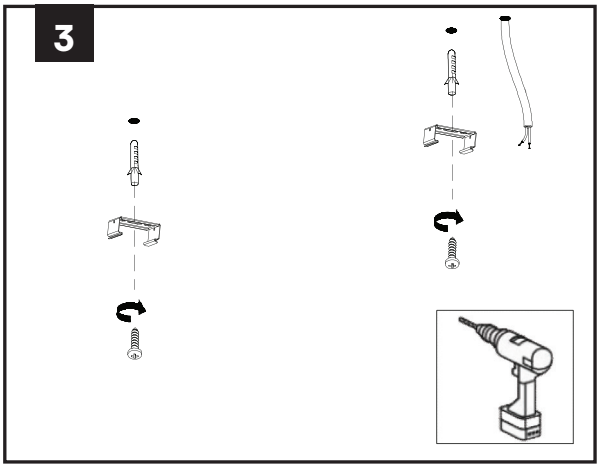


4

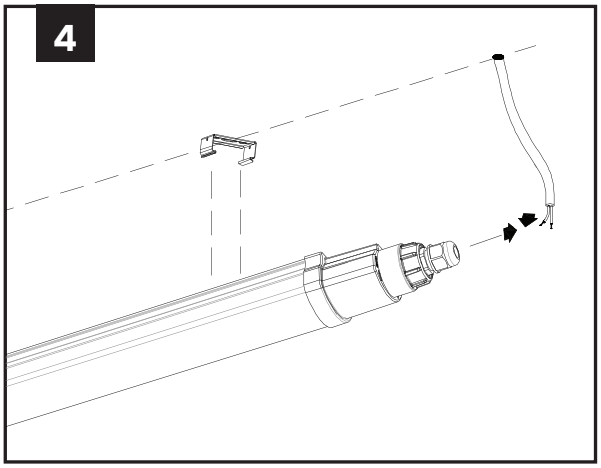


5

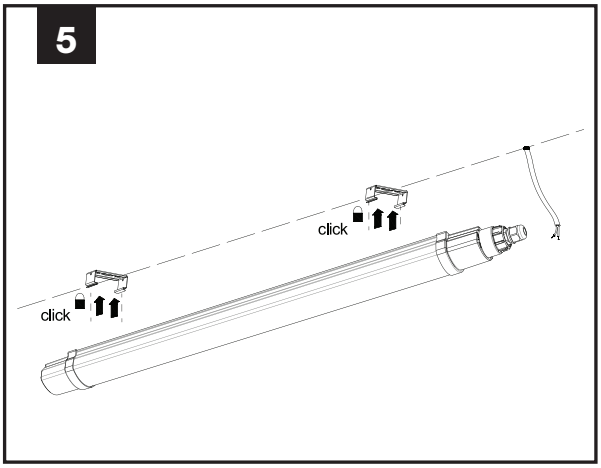
click
click


6

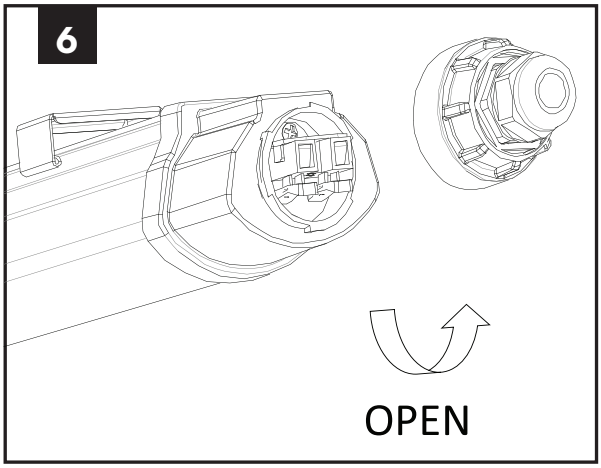
OPEN


7

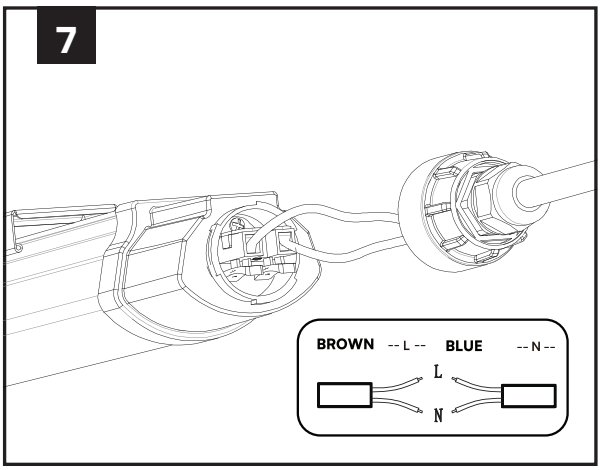
BROWN -- L --
BLUE -- N --
L
N


8

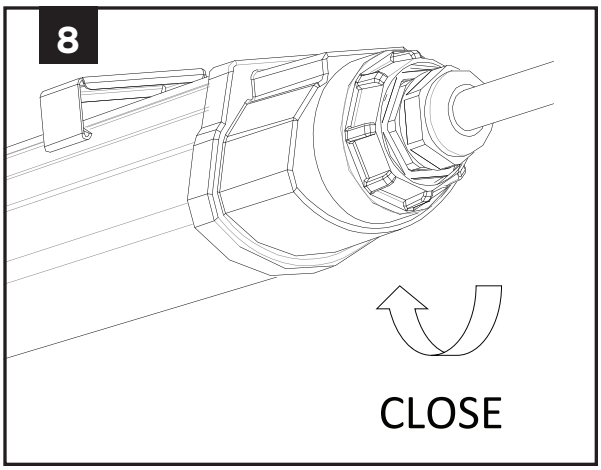
CLOSE

9

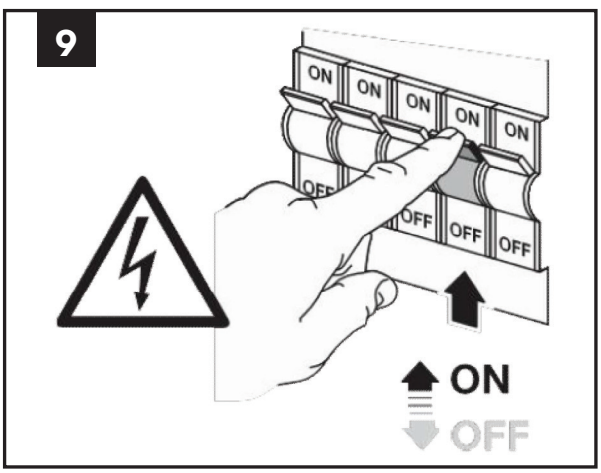
ON
ON
ON
ON
ON
OFF
OFF
OFF
ON
OFF

10

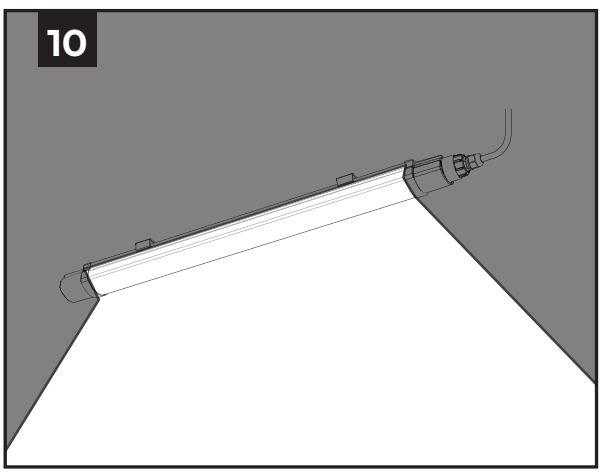

INSTALLATION INSTRUCTIONS

1. Turn off the power.
2. Mark the proper drilling points according to the provided chart.
3. Fix the brackets to the ceiling using the supplied screws.
4. Open the junction box cover of the fixture using a screwdriver.
5. Verify that the cable length is sufficient.
6. Install the lamp onto the ceiling clips.
7. Open the right-side lid and insert the cable through the waterproof connector, then wire it into the terminal block, ensuring LIVE = Brown and NEUTRAL = Blue are connected correctly.
8. Close the right-side lid securely.
9. Turn on the power and test the fixture.

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX