V-TAC
Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL
LED DOME LIGHT





MODEL	VT-8618		VT-8624		VT-8630	
SKU	7615,7616,7617,7624 7625,7626,7633,7634 7635,7642,7643,7644		7618,7619,7620,7627 7628,7629,7636,7637 7638,7645,7646,7647		7621,7622,7623,7630 7631,7632,7639,7640 7641,7648,7649,7650	
WATTS	18W		24W		30W	
LUMENS	1800LM		2400LM		3000LM	
CRI	>80		>80		>80	
BEAM ANGLE	120°		120°		120°	
BODY TYPE	PP+PMMA		PP+PMMA		PP+PMMA	
TOTAL CURRENT	100mA		170mA		140mA	
LUMEN PER WATTS	100lm/w		100lm/w		100lm/w	
INPUT POWER	AC:220-240,50/60Hz		AC:220-240,50/60Hz		AC:220-240,50/60Hz	
LIFE SPAN	20,000 Hours		20,000 Hours		20,000 Hours	
ON/OFF CYCLE	>15,000		>15,000		>15,000	
SHAPE	ROUND	SQUARE	ROUND	SQUARE	ROUND	SQUARE
DIMENSION (LxWxH)	⌀225x55mm	225x225x60mm	⌀295x55mm	295x295x65mm	⌀420x55mm	420x420x65mm

02 YEAR WARRANTY*

IP44 RATING

SPHERE 360° STAYS BRIGHT

'This product contains a light source of energy efficiency class <F>', where <F> shall be replaced by the energy efficiency class of the contained light source.

INTRODUCTION & WARRANTY
Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING:
- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a certified person.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- For Indoor use only
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Method of attachment of the cable or cord such that any replacement can only be made by the manufacturer, his service agent or similar qualifed person.

This marking indicates that this product should not be disposed of with other household wastes.

Caution, risk of electric shock.

Replaceable (LED Only)light source by a professional


ATTENTION!
Do not look directly at LED light beam. Product can only be supplied by rated voltage or voltage within the range provided. It's forbidden to use the product with damaged protective cover. Product must not be used in unfavorable conditions, e.g. dust, water, moisture, vibrations, explosive air atmosphere, fumes, or chemical fumes, etc. In the area of strong electromagnetic interference, the functioning of the product may be disrupted.


USAGE GUIDELINES / MAINTENANCE
Any maintenance work must be performed when the power supply is cut off and the product has cooled down. Clean only with soft and dry cloths. Do not use chemical detergents. Do not cover the product. Ensure free air access. Product may heat up to a higher temperature.


MOUNTING:
Read the manual before mounting. Mounting should be performed by a qualified electrician. Exercise caution. Product has a protective contact /terminal. Failure to connect the protective lead may lead to electric shock. Mounting diagram: see pictures. Check for proper mechanical fastening and connection to electrical power prior to first use.


INSTALLATION INSTRUCTION:
- Switch Off the Power Before Starting the Installation.
- Twist and remove the cover (Ref Image Part 2)
- Drill a hole in the ceiling to fix the light using screws (Ref Image Part 3)
- Connect the wires (Ref Image Part 4) before fixing the light using screws on the ceiling.
- Twist and lock the cover to the light (Ref Image Part 5)
- Switch ON the power and test the light.


INSTALLATION DIAGRAM:

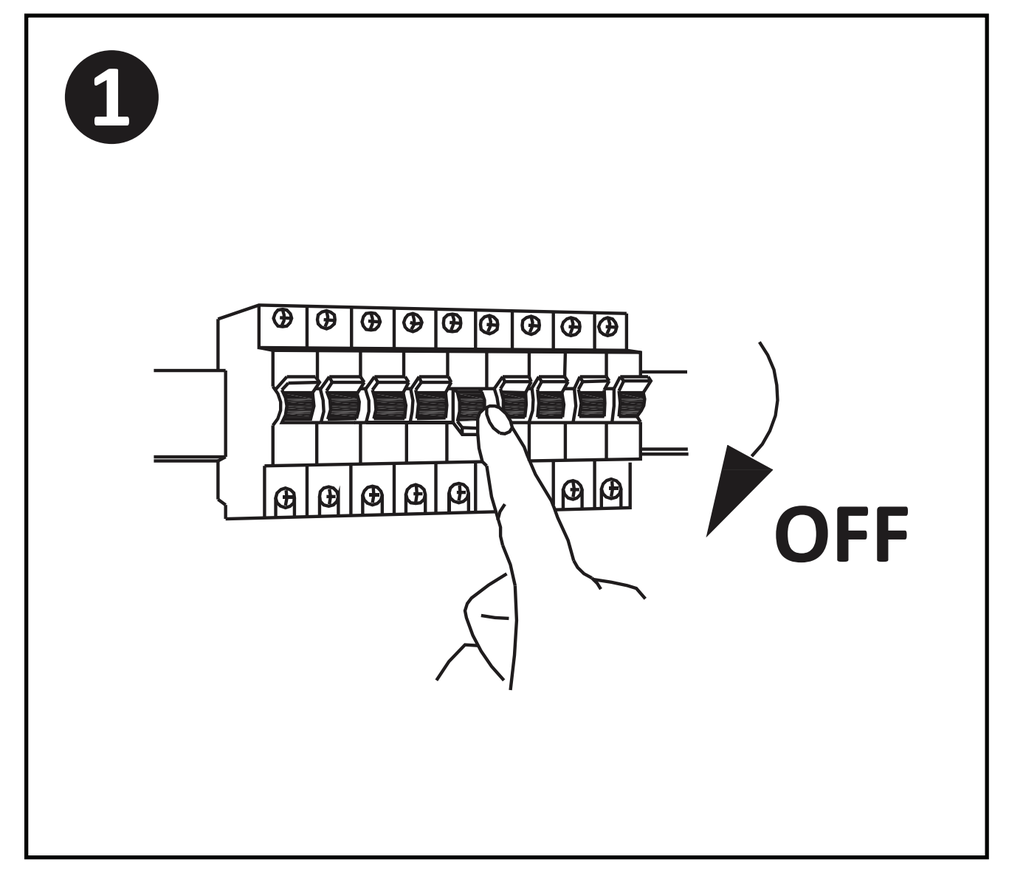


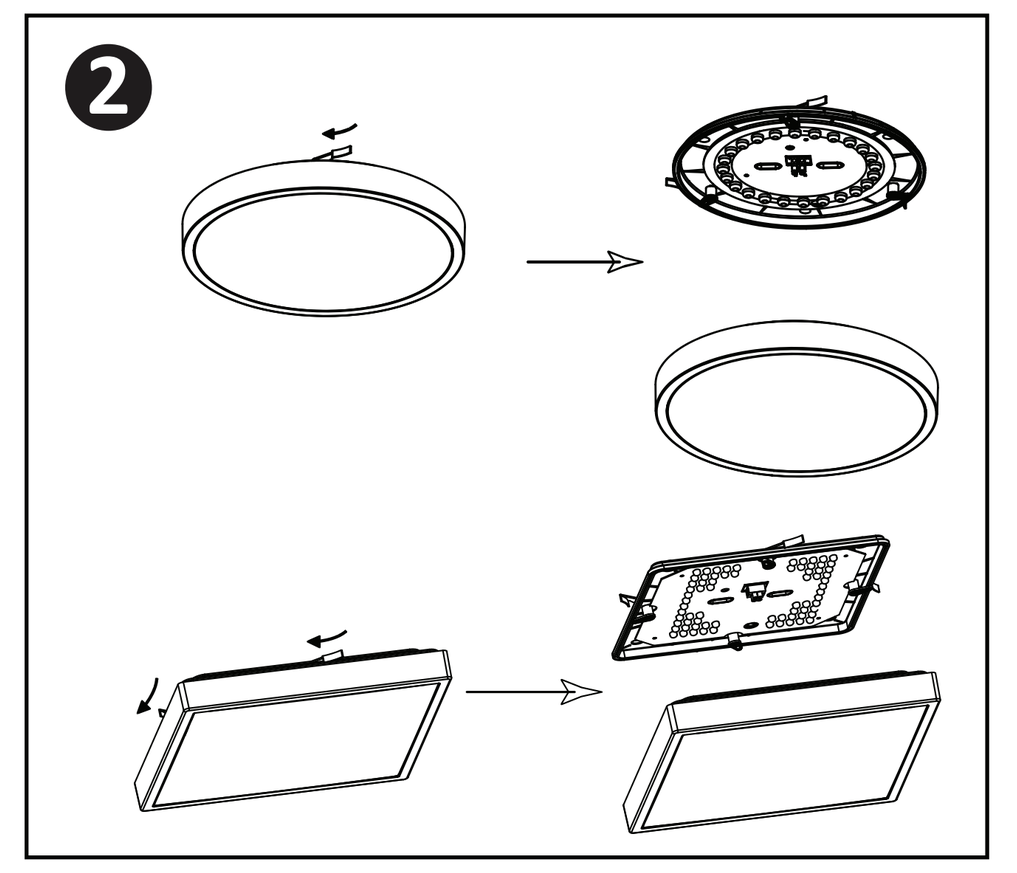

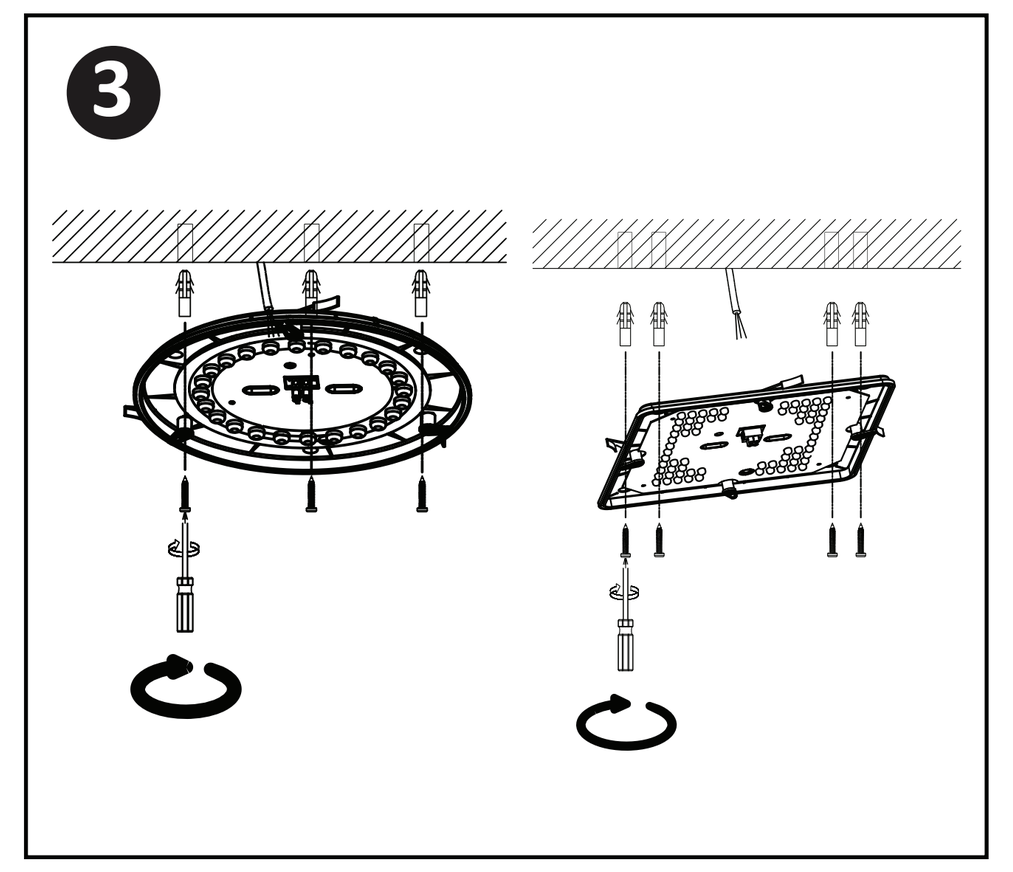

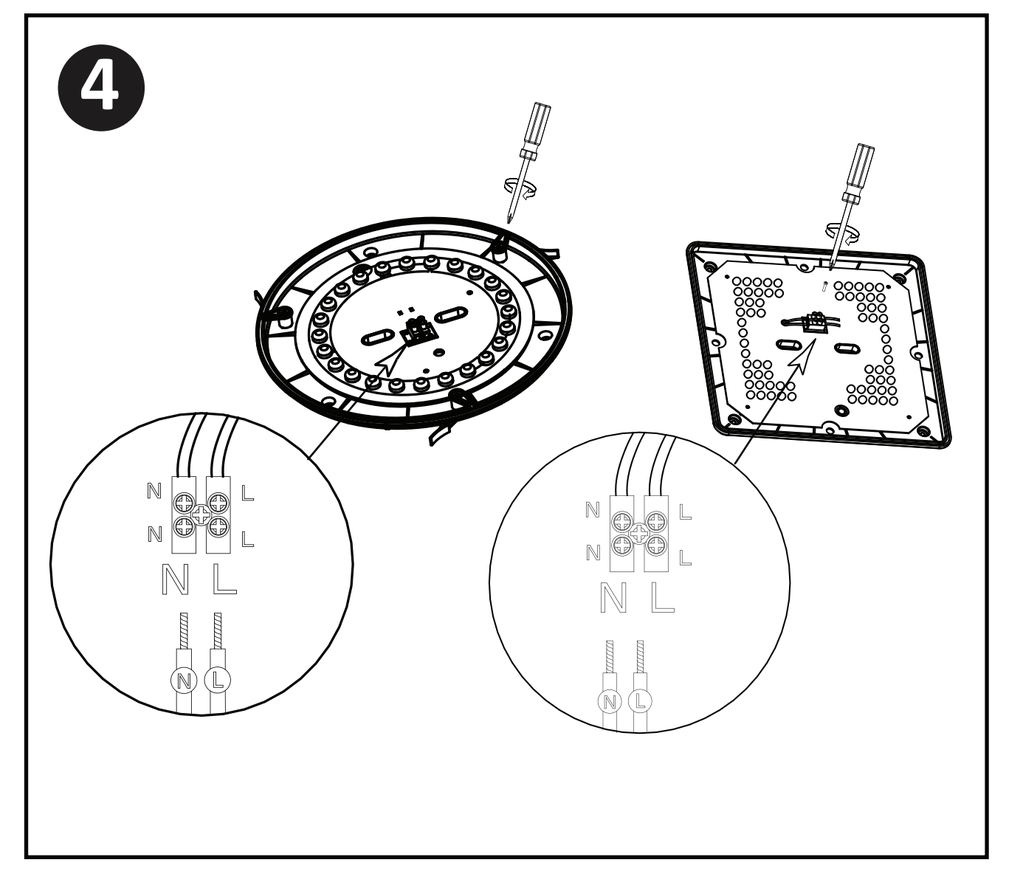

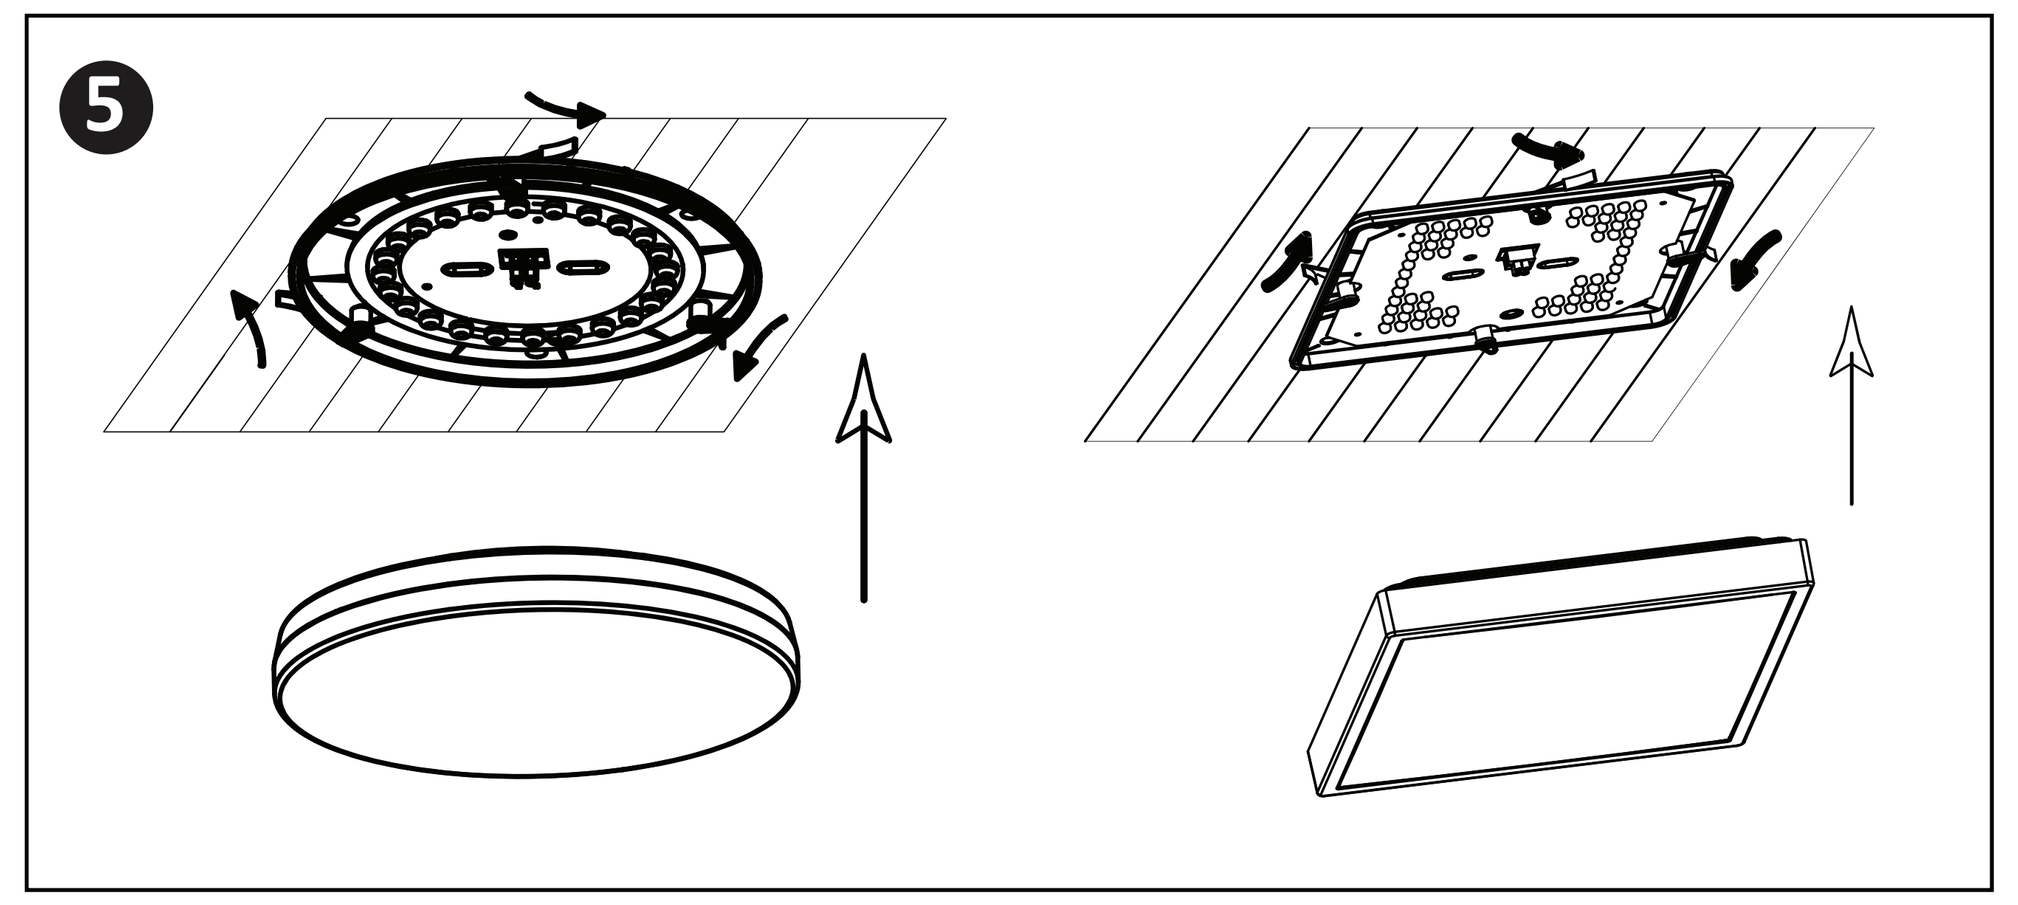

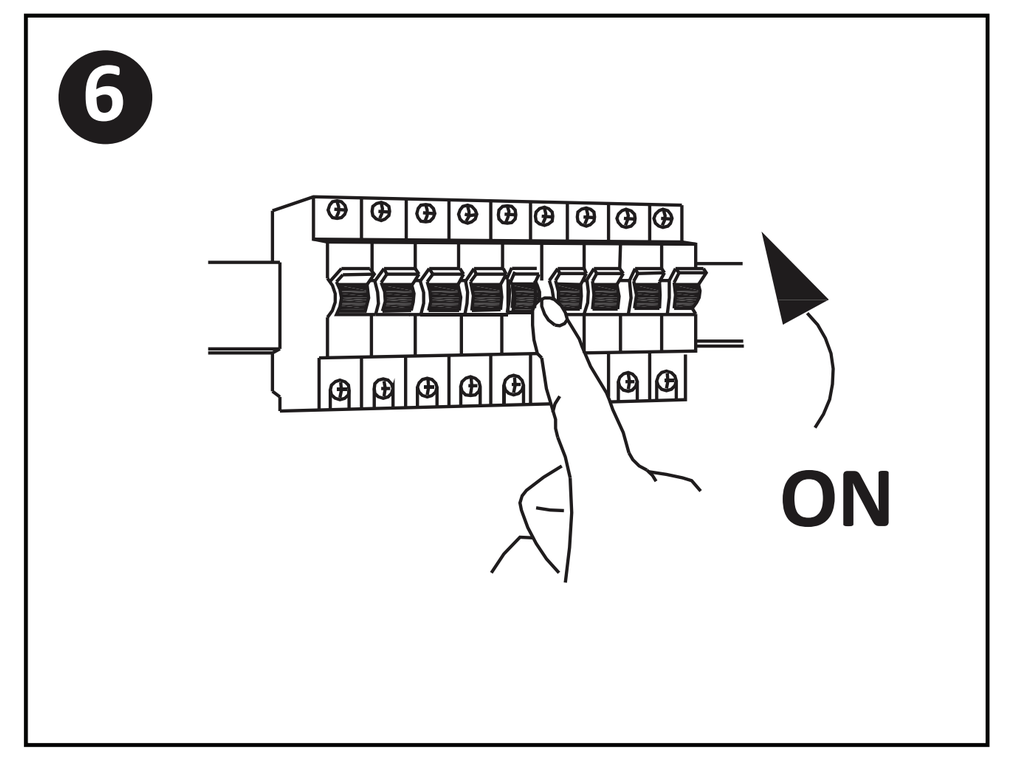

RoHS CE UK CA

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B