Meaningful Innovation

WEEE Number: 80133970

INSTRUCTION MANUAL

LED LINEAR HIGHBAY



05 YEAR WARRANTY*

IP65 RATING

TECHNICAL DATA

MODEL	SKU	WATTS	LUMENS @WIDE CONE	BEAM ANGLE	CRI	DF	LIFE SPAN	OPERATION TEMPERATURE	DIMENSION	INPUT POWER	N.W (KGS)	MAX MOUNTING HEIGHT
VT-92155	23827 23828	150 W	13200 lm	115°	>70	>0.9	25,000 Hours	-20° to +45°C	760x97x53.2mm	AC:220-240V 50/60Hz	1.26	<5M
VT-90205	23829 23830	200 W	17600 lm	115°	>70	>0.9	25,000 Hours	-20° to +45°C	1010x97x53.2mm	AC:220-240V 50/60Hz	1.65	<5M

This product contains a light source of energy efficiency class <F>', where <F> shall be replaced by the energy efficiency class of the contained light source.

INTRODUCTION AND WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Proper grounding should be ensured throughout the installation.
- To be connected with waterproof cable hose.
- Replace any cracked protective shield.
- Terminal block not included.

MULTI-LANGUAGE MANUAL QR CODE
Please scan the QR code to access the manual in multiple languages.

RoHS

22 PAP


Caution, risk of electric shock.

This marking indicates that this product should not be disposed of with other household wastes.

Replaceable (LED only) light source by a professional

FR
Cet appareil, ses accessoires et cordons se recyclent
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

INSTALLATION DIAGRAM

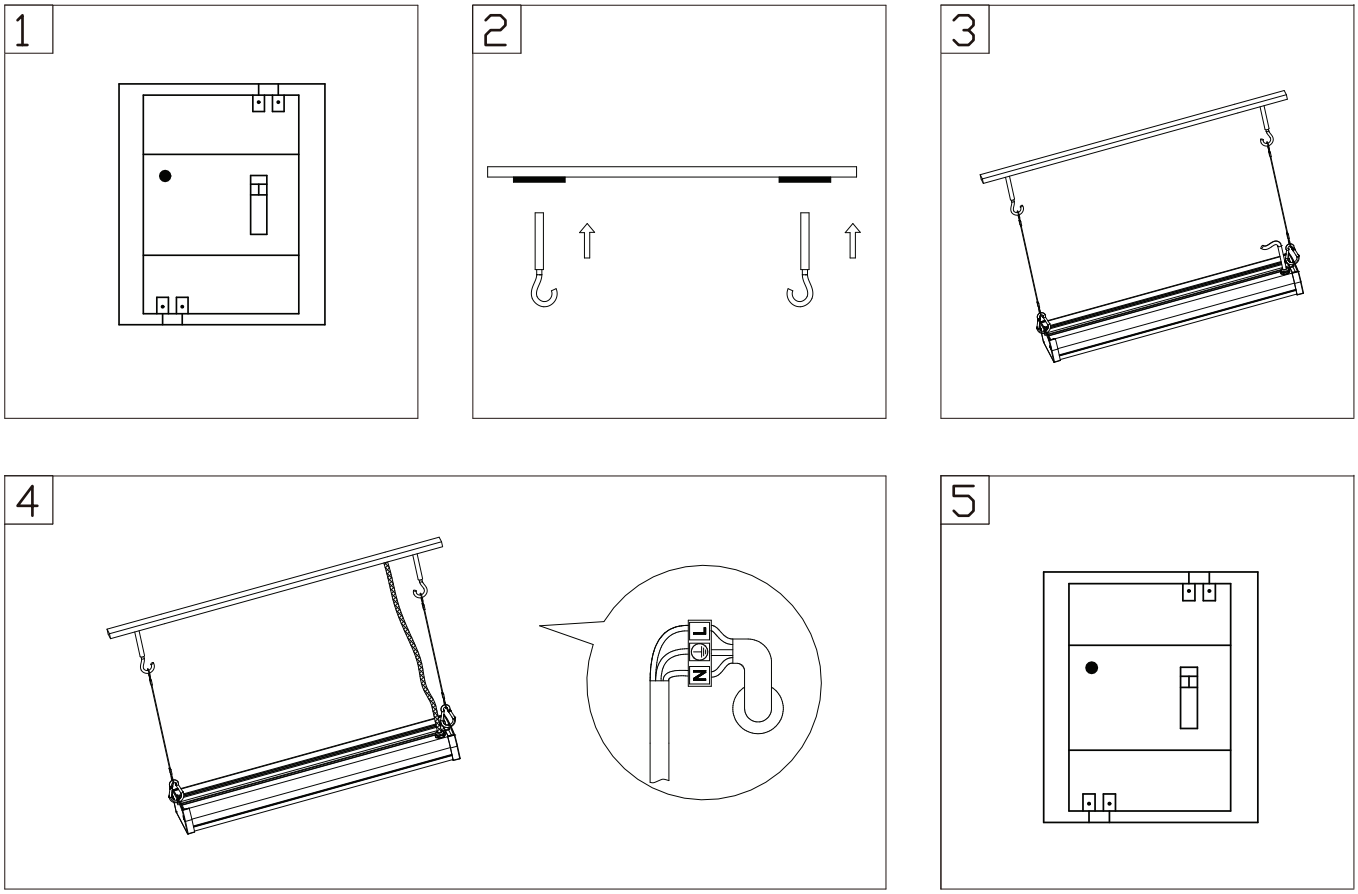


INSTALLATION INSTRUCTION

Step 1: Switch OFF the power
Step 2: Install the expansion hook onto the wall
Step 3: Hang the installed Highbay into the top hook through a steel wire rope (as shown in the figure3)
Step 4: The input line is connected to the "L" live wire in brown, the "N" zero wire in blue, and the yellow green wire is connected to the ground wire. After connecting the wires, it is necessary to use insulation tape and waterproof tape for insulation and waterproofing treatment. It is recommended to use a professional waterproof junction box.
Step 5: Swith ON the power and test.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

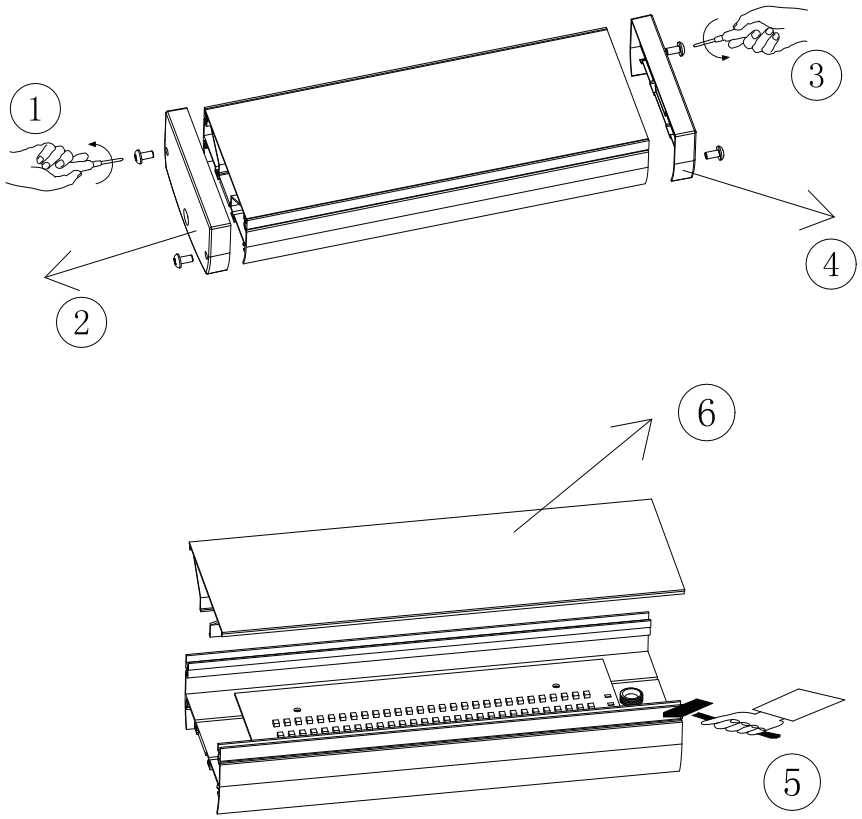

Note: Light source removal will void the warranty

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B