Meaningful Innovation.

INSTRUCTION MANUAL

LED HIGHBAY

CREE LED POWERED

6 YEAR WARRANTY*



IP65 RATING

TECHNICAL DATA

MODEL	SKU	WATTS	LUMEN @WIDE CONE	BEAM ANGLE	LIFE SPAN [HOURS]	DF	CRI	INPUT VOLTAGE	DIMENSION	N.W	MAX MOUNTING HEIGHT	PROJECTED AREA	BODY TYPE	IK RATING
VT-91102	240756 240746	100W	13500 Lm	90°	50,000	≥0.9	>70	AC: 220-240V, 50/60Hz	244x244x105mm	1550g	3m	20-30m²	Aluminium	IK06
VT-91152	240776 240766	150W	20200 Lm	90°	50,000	≥0.9	>70	AC: 220-240V, 50/60Hz	286x286x105mm	1700g	4m	30-40m²	Aluminium	IK06
VT-91202	240796 240786	200W	27000 Lm	90°	50,000	≥0.9	>70	AC: 220-240V, 50/60Hz	326x326x105mm	1850g	5m	40-50m²	Aluminium	IK06

The operating temperature range for these items is -20°C to +40°C.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 6 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

FR

Cet appareil, ses accessoires et cordons se recyclent

À DÉPOSER EN MAGASIN


OU

À DÉPOSER EN DÉCHÈTERIE


Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- The servicing of the controlgear in this luminaire should only be undertaken by the manufacturer or their service agent or a similarly skilled person.
- Terminal block not included. Must be connected to waterproof terminal box.
- Proper grounding should be ensured throughout the installation.
- For outdoor use.
- Replace any cracked protective shield.
- Minimum distance from lighted objects 1m. 1M




Replaceable light source by a professional



Replaceable control gear by a professional

NOTE

- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall. Only to be installed outside arm's reach.
- In order to maintain the IP protection of the product, the cable entry/gland should be installed on the bottom side.




Caution, risk of electric shock.




This marking indicates that this product should not be disposed of with other household wastes.

INSTALLATION DIAGRAM


1




2

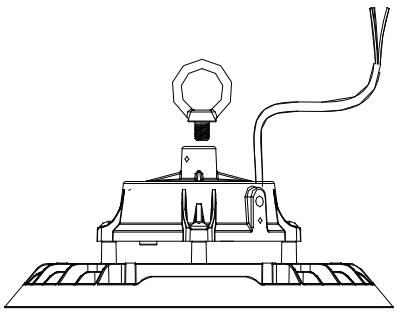

3

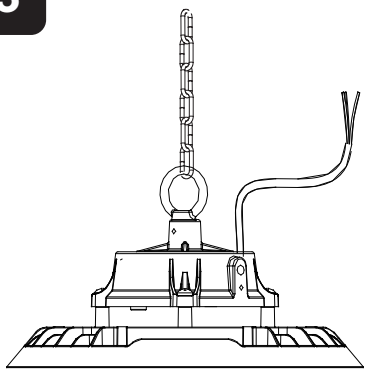


4

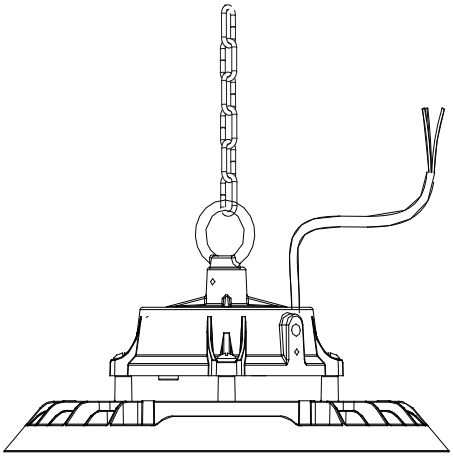

WIRE LENGTH: 300±10mm

WIRING DIAGRAM



INSTALLATION INSTRUCTIONS


Important: Strictly follow the instructions below during installation. Avoid applying excessive force to the power cable. The supply connection and other external wiring conductors must be at least 3 × 1.0 mm².

- Ensure the power is turned off before starting the installation.
- Install the hanging parts (derrick or chain hoist). Ensure that the hanging parts are strong and securely fixed.
- Attach the hook to the housing of the highbay light.
- Hang the highbay light onto the installed hanging parts.
- Connect the wiring of the highbay light according to the wiring diagram.
- Turn on the power and test the light.

Note: Hanging parts must be purchased separately.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

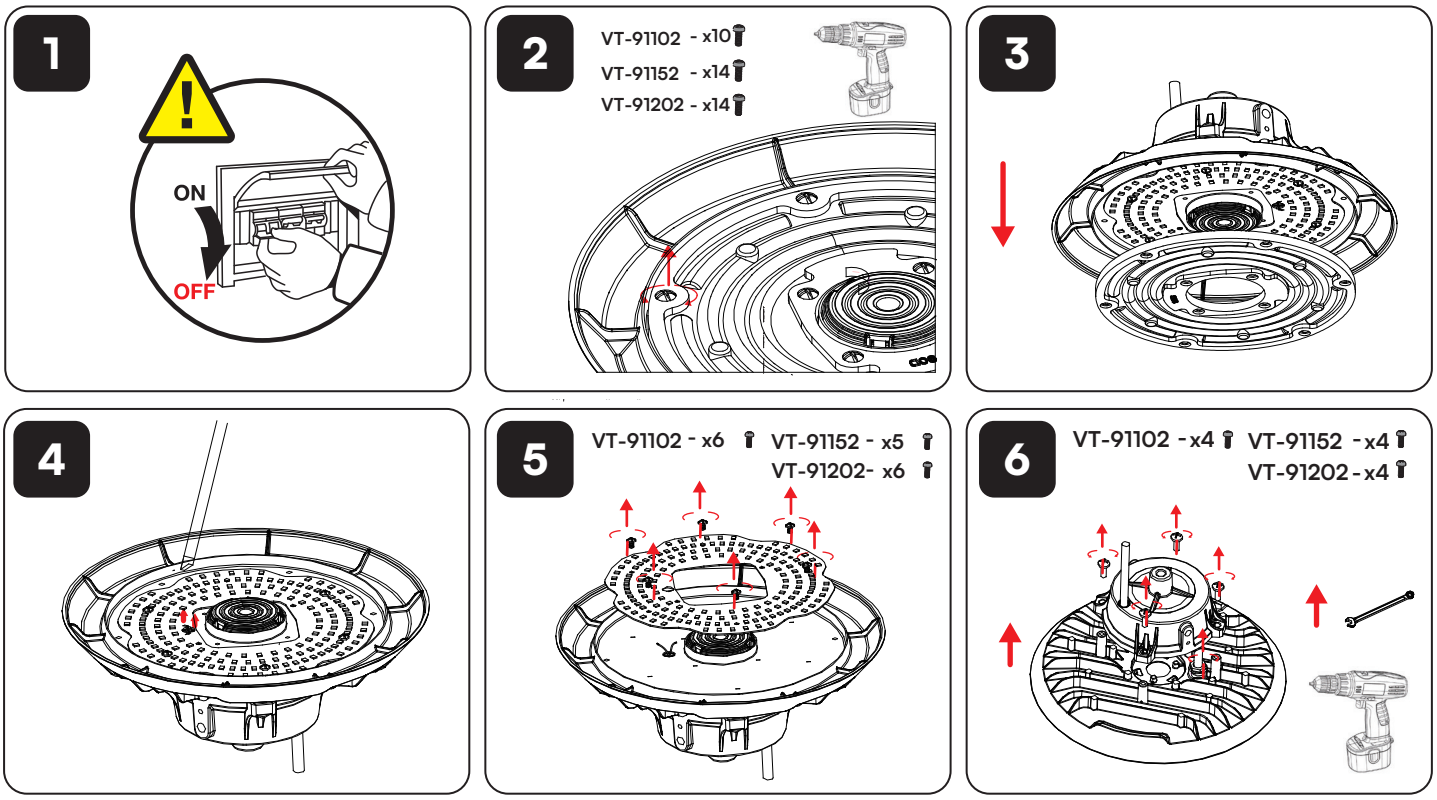

Note

- Light source removal will void the warranty.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

RoHS CE UKCA 22 PAP