Meaningful Innovation.

INSTRUCTION MANUAL

LED HIGHBAY

TECHNICAL DATA

MODEL	VT-92101	VT-92151	VT-92201
SKU	217808	217810, 217811	217812, 217813
WATTS	100W	150W	200W
LUMENS @SPHERE360°	13500 Lm	20250 Lm	27000 Lm
INPUT VOLTAGE	AC: 220-240V, 50/60hz		
BEAM ANGLE	90°		
LIFE SPAN	25,000 Hours		
ON/OFF CYCLE	15,000 Times		
CRI	70		
PF	>0.9		
SAFETY CLASS	Class 1		
MATERIAL	Aluminium		
WIRE LENGHT	250mm		
IK RATING	IK06		
N.W (KGS)	0.79KGS/PC	1.2KGS/PC	1.4KGS/PC
MAX. MOUNTING HEIGHT	<5M	<5M	<5M
DIMENSION	Ø250x70.1mm	Ø295x70.1mm	Ø320x70.1mm



*This product contains a light source of energy efficiency class<D>, where <D> shall be replaced by the energy efficiency class of the contained light source.

IP65 RATING

05 YEAR WARRANTY*

Lumen efficiency **135** LUMENS/W

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the whole luminaire shall be replaced.
5. Proper grounding should be ensured throughout the installation.
6. Terminal block not included.
7. Must be connected to waterproof terminal box.
8. Replace any cracked protective shield.
9. Minimum distance from lighted objects 1m. 1M
10. For outdoor use only.


MULTI-LANGUAGE MANUAL QR CODE


Please scan the QR code to access the manual in multiple languages.


This marking indicates that this product should not be disposed of with other household wastes.


Caution, risk of electric shock.


INSTALLATION DIAGRAM

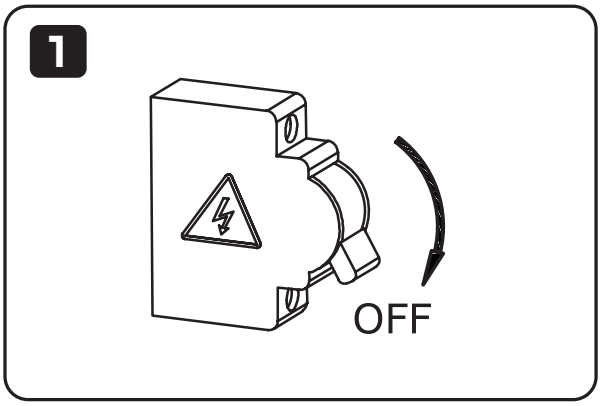

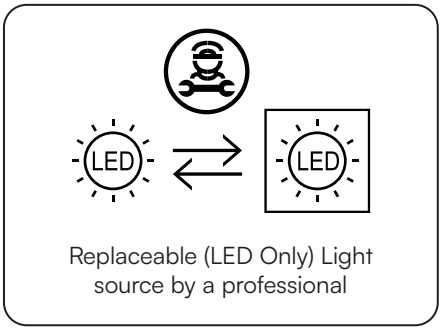

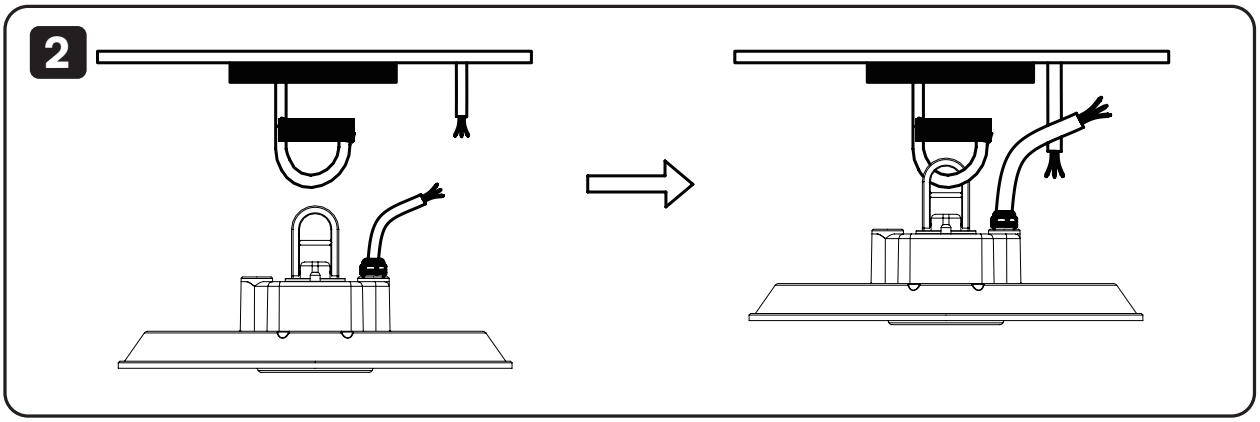

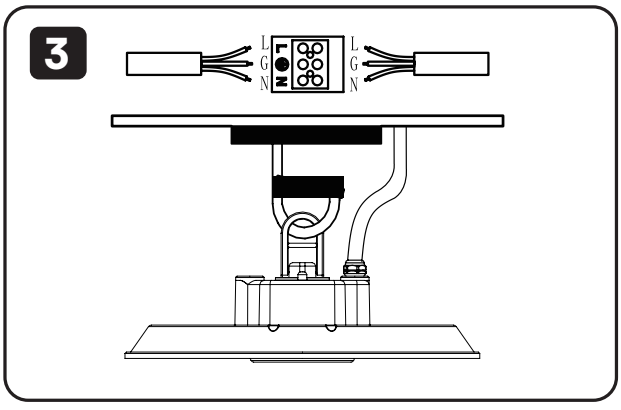

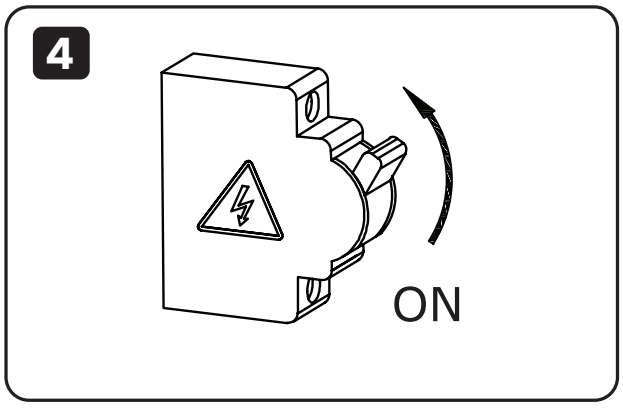

INSTALLATION INSTRUCTIONS

1. Step 1: Switch OFF the power
2. Step 2: Hang the lamp on a hook
3. Step 3: Connect L, N and ⏚ Wires
4. Step 4: Switch ON the power and test




NOTE

- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm›s reach.
- In order to maintain the IP protection of the product, the cable entry/gland should be installed on the bottom side.


DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

100W/150W

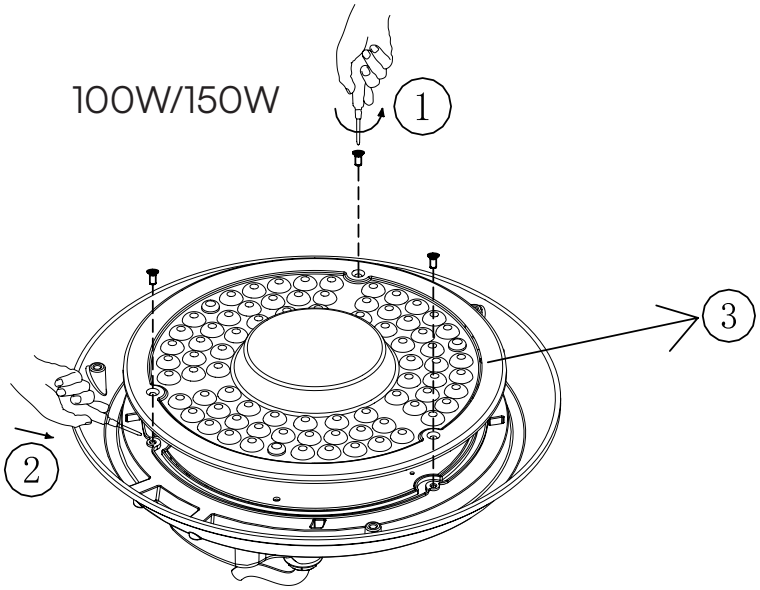

200W

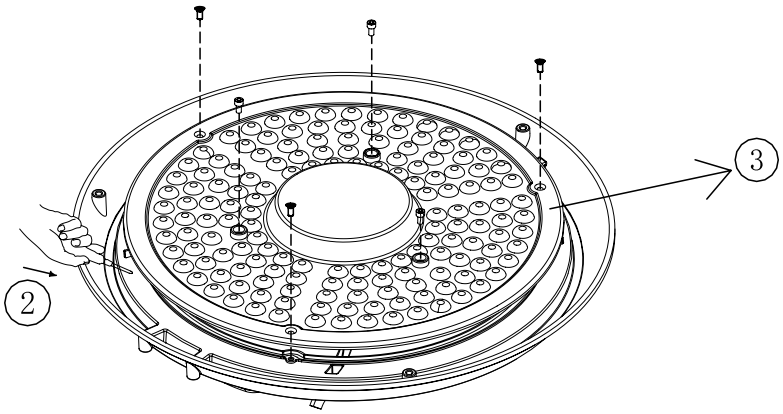

Note

- Light source removal will void the warranty.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

RoHS

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593