Meaningful Innovation.

INSTRUCTION MANUAL

LED BACKLIT PANEL

TECHNICAL DATA

MODEL	VT-61037
SKU	23765, 23766
POWER	36W
LUMEN	4320 Lm [@SPHERE360°]
BEAM ANGLE	110°
CRI	≥80
DF	≥0.9
LIFE SPAN	20,000 Hours
ON/OFF CYCLE	10,000 Times
IP RATING	IP20
OPERATING TEMPERATURE	-10°C to +35°C
INPUT VOLTAGE	AC: 220-240V, 50/60Hz
DIMENSION	595x595x33.5 mm



2 IN 1
Surface and Recessed

02 YEAR
WARRANTY*

SUPER BRIGHT
120
LM/WATT EFFICIENCY


FR
Cet appareil, ses accessoires et cordons se recyclent
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

INTRODUCTION & WARRANTY


Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.



Non-replaceable light source



Non-replaceable control gear


IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

This marking indicates that this product should not be disposed of with other household wastes.

Caution, Risk of electric shock

WARNING


- Please make sure to turn off the power before starting the installation.
- Installation should only be done by a certified electrician.
- The control gear of this luminaire is a non-replaceable component; when the control gear reaches its end of life the whole luminaire shall be replaced.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by the manufacturer or their service agent or a skilled person.
- Terminal block not included.
- Must be connected to waterproof terminal box.
- For Indoor use only.



Luminaires not suitable for covering with thermally insulating material.


INSTALLATION INSTRUCTIONS
RECESSED INSTALLATION

1

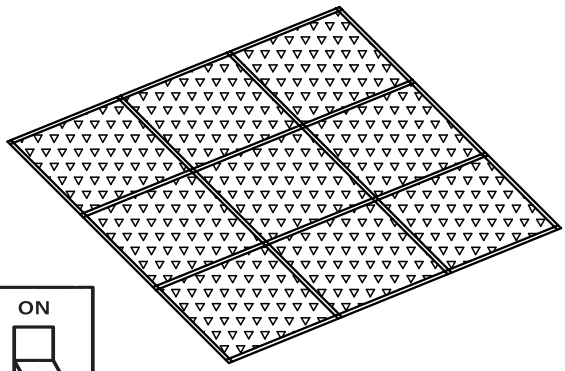


1. Cut an opening in the ceiling.

2

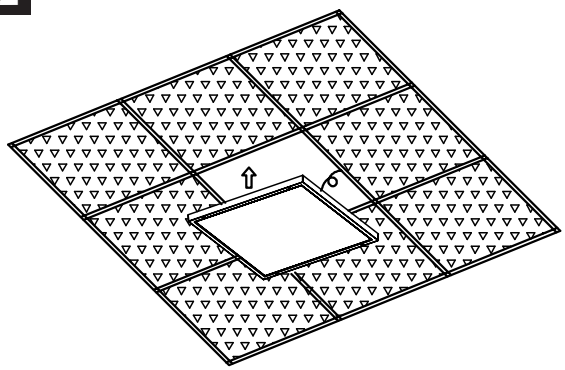

2. Mount the panel securely onto the ceiling.


3

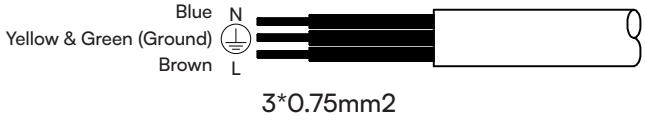

3*0.75mm2

3. Connect the cable to the terminal as shown

4

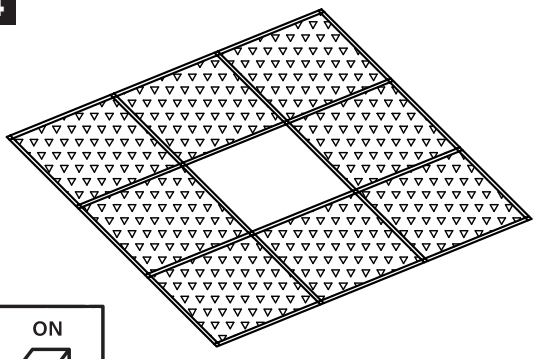





4. Turn on the power and test the light.

SURFACE INSTALLATION


1

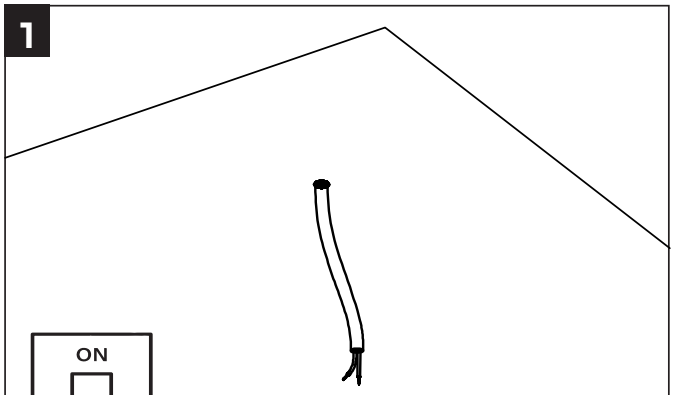




1. Made holes in the ceiling and lead out the wire.


2

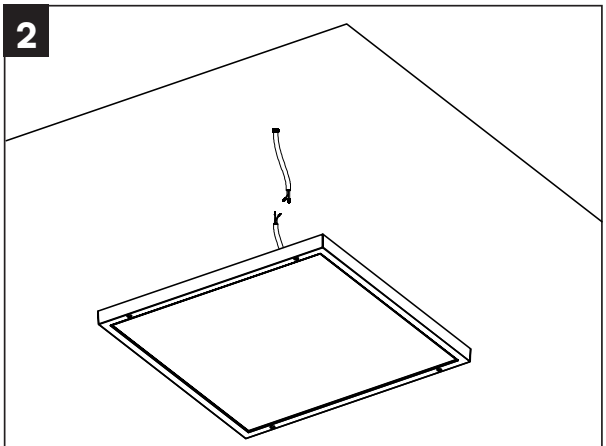

2. Wire and lamp wire docking.


3

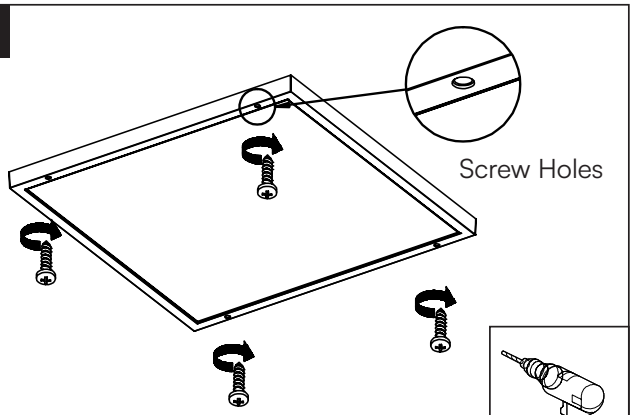



3. Screw the lamp to the ceiling.

4

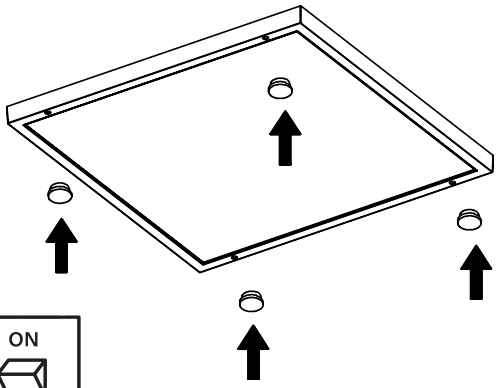



4. Plug the screw hole with a soft rubber plug.

RoHS

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX