Meaningful Innovation.

INSTRUCTION MANUAL

LED SURFACE/RECESSED PANEL

TECHNICAL DATA

MODEL	VT-6147
SKU	216625,216626
WATTS	40W
LUMEN @SPHERE 360°	4400 Lm
BEAM ANGLE	110°
CRI	≥80
DF	≥0.9
IP RATING	IP20
BODY TYPE	FE + PS
LIFE SPAN	20,000 Hours
ON/OFF CYCLE	>15,000 Times
OPERATION TEMPERATURE	-20 to +40°C
DIMENSION	1195x295x30mm
INPUT VOLTAGE	AC:220-240V,50/60Hz



2 IN 1 RECESSED OR SURFACE

02 YEAR WARRANTY*

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.


WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. The control gear of this luminaire is a non-replaceable component; when the control gear reaches its end of life the whole luminaire shall be replaced.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
6. Proper grounding should be ensured throughout the installation.
7. For Indoor use only.

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.







Caution, risk of electric shock.



This marking indicates that this product should not be disposed of with other household wastes.



Non-replaceable light source




Non-replaceable control gear




Luminaires not suitable for covering with thermally insulating material.

INSTALLATION INSTRUCTIONS


INSTALLATION FOR RECESSED

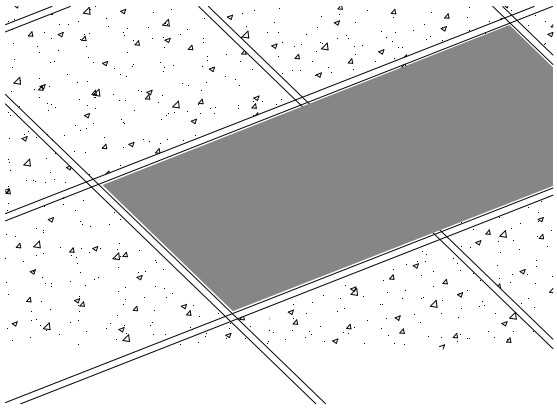


1. Make a hole into the ceiling

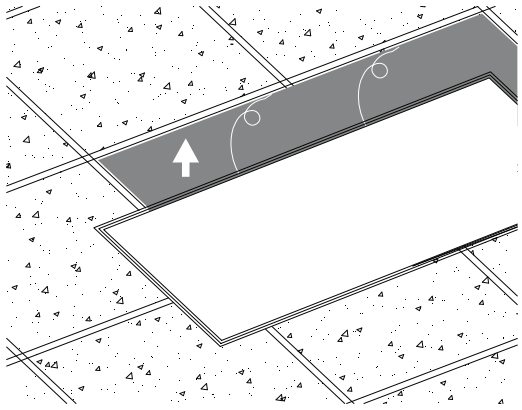

2. Fix the Panel into the Ceiling

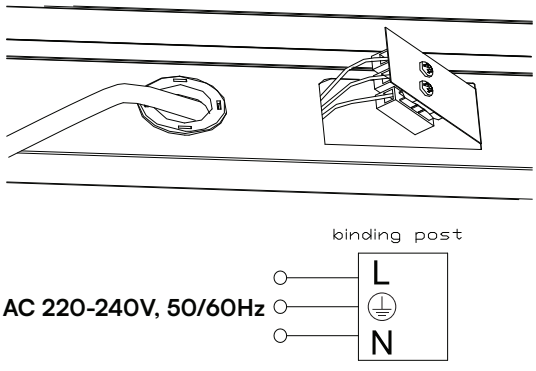


3. Connect the cable into the terminal

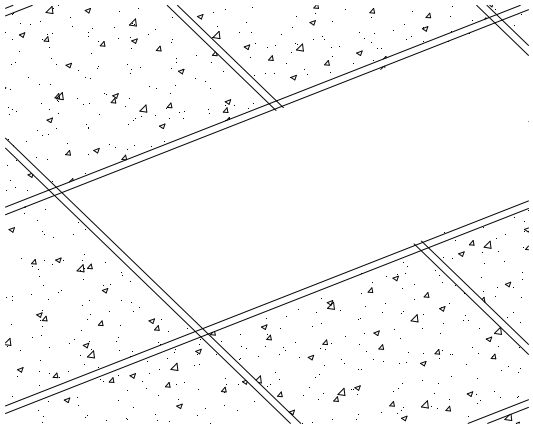


4. Turn on the switch and test the Panel


INSTALLATION FOR SURFACE

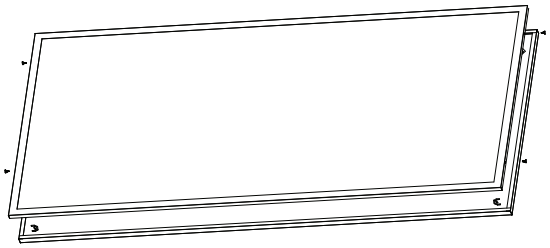


1. Remove the cover as shown below.

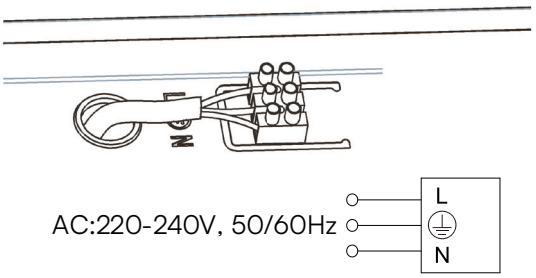

2. Connect the cable into the terminal.

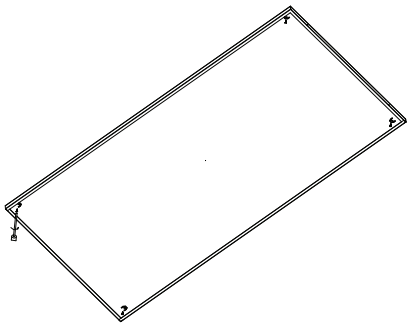

3. Fix the panel onto the ceiling.

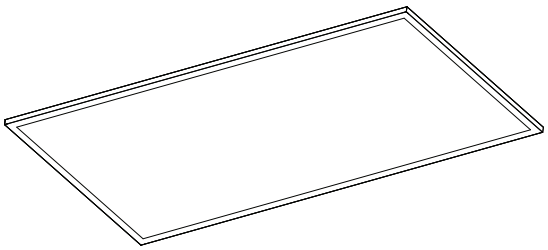

4. Fix the cover and test the fixture light

RoHS

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX