
Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED DIAMOND BORDERLINE PANEL

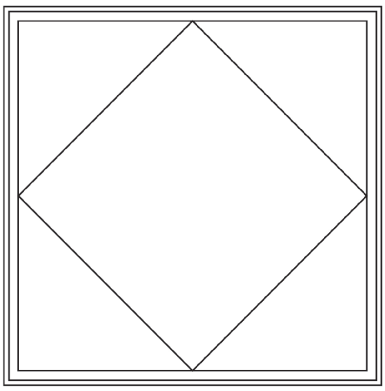

TECHNICAL DATA

MODEL	VT-6163
SKU	23665, 23666
SHAPE	SQUARE
WATTS	60W
LUMENS	6000 Lm Useful Lumen
BEAM ANGLE	110°
CRI	>80
DF	>0.9

05 YEAR WARRANTY*

LiFud® Driver

QUICK CONNECTOR

LIFE SPAN	30,000 Hours
ON/OFF CYCLE	>15,000
OPERATING TEMPERATURE	-20°C to +40°C
INPUT POWER	DC: 33-40V
IP RATING	IP20
BODY TYPE	Aluminium + PC
DIMENSION	595x595x15mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



This marking indicates that this product should not be disposed of with other household wastes.




Caution, Risk of electric shock


IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC HOUSE, KELPATRICK ROAD, SLOUGH, BERKSHIRE, SL1 6BW, UK.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. the external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. For Indoor use only.



Non-replaceable light source



Replaceable control gear by a professional

Note: The panel works on DC 33-40V, please connect correctly with the conductor before connecting the conductor to the power supply main. (2 Drivers and 2 Quick Connectors are included)




Luminaires not suitable for covering with thermally insulating material.




INSTALLATION INSTRUCTION

1

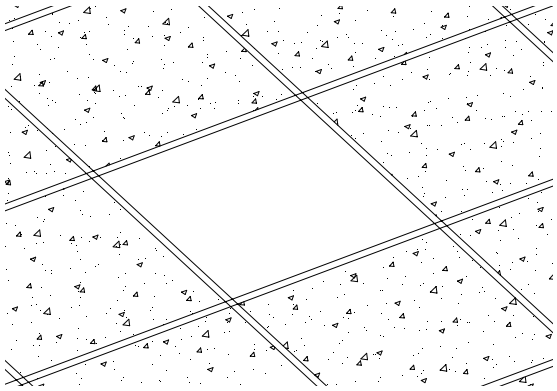


1. Make a hole into ceiling

2

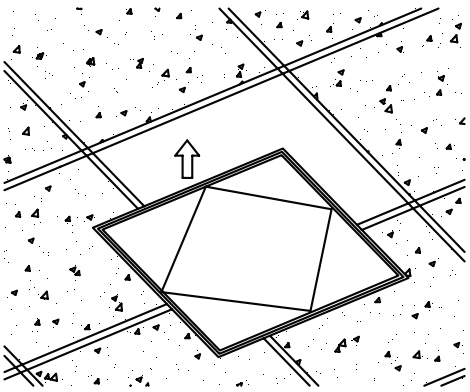


2. Fix the panel into ceiling.

3

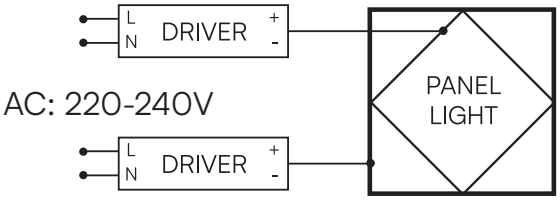

3. Wire the DC cable of the panel to the driver (Included 2 Drivers) and then wire the AC source cable to the power supply.


4

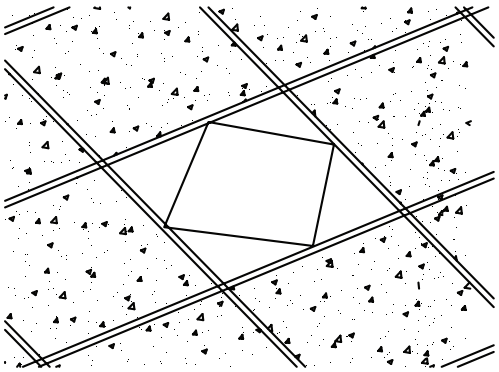

4. Turn on the switch, test the fixture light on.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

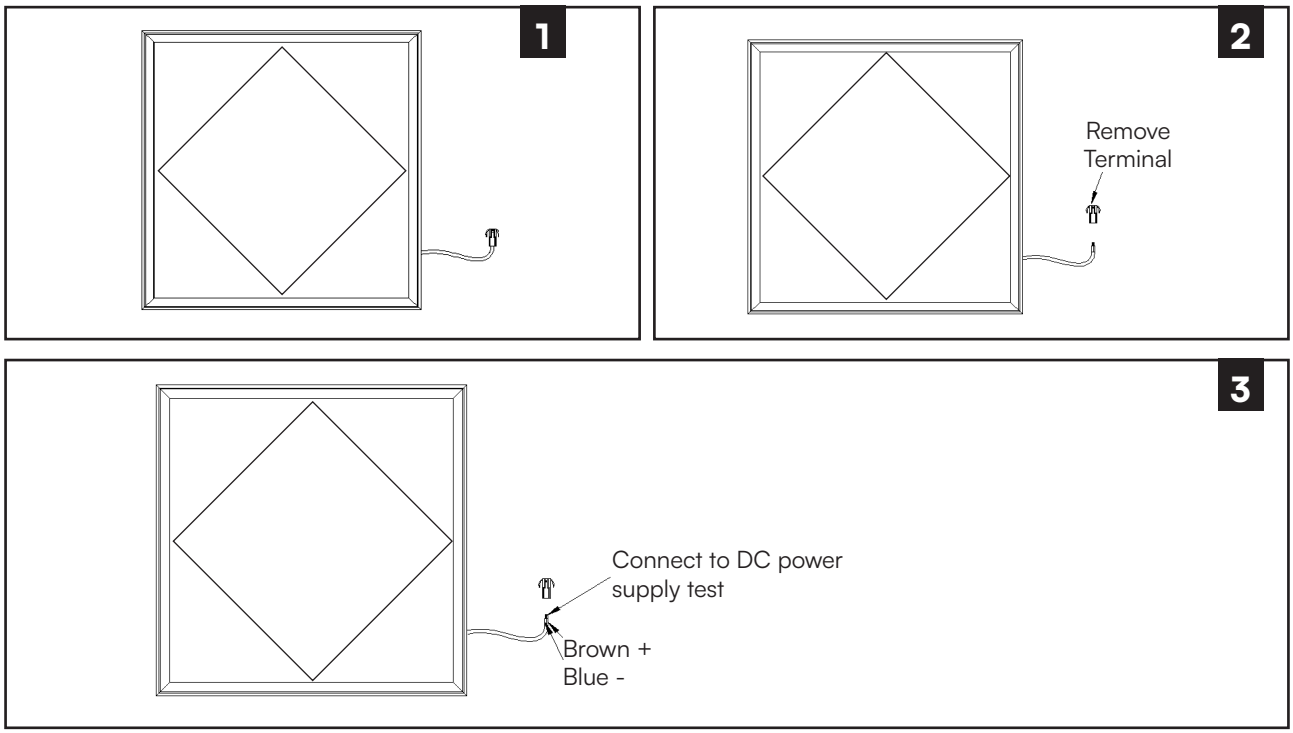

Note: Light source removal will void the warranty

RoHS Not Dimmable 22 PAP