V-TAC

Meaningful Innovation.

WEEE Number : 80133970

INSTRUCTION MANUAL

SMART WIFI RECEIVER



Smart Life

02 YEAR WARRANTY*

TECHNICAL DATA

MODEL	VT-5130
SKU	8459
INPUT VOLTAGE	AC:85-275V, 50/60Hz
UNIT COLOR	White
BODY TYPE	PC
DIMENSION	54x28x24mm
OPERATION TEMPERATURE	-40°C to +70°C
RATED LOAD	Max. 1000W
MAXIMUM CURRENT	10A
CONTROLLING DISTANCE	≤40M
IP RATING	IP20

WORKS WITH alexa

works with Ok Google

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

FR

Cet appareil, ses accessoires et cordons se recyclent

À DÉPOSER EN MAGASIN ou À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. For Indoor use only

NOTE

- This device requires Wi-Fi Frequency 2.4 GHz Wi-Fi (standard IEEE 802.11 b/g/n)
- 433 MHz RF communication

VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

RoHS


WIFI MODULE SAFETY INSTRUCTIONS

- Make sure that the Input voltage of this product is as prescribed by the manufacturer. Other incoming voltages can cause the product to break down and potentially harm the environment and your health.
- The wires must be connected correctly and in accordance with the colors of the wire and the instructions given in the circuit diagram described in this instruction.
- Make sure before switching on that the power elements have a power lower than that specified by the manufacturer.
- Make sure before plugging in that the led light voltage is suitable for configuration with this product.
- This product is suitable for products manufactured by the company V-TAC, when connected with products of other companies, V-TAC is not responsible for any adverse consequences for your health.


WARNING SYMBOLS USED
This is the safety alert symbol. This symbol alerts you to potential hazards that could result in property damage and/or serious bodily harm or death.

RECEIVER INSTALLATION INSTRUCTIONS


1. Loosen the screws with a screwdriver
2. If you use a small gauge wire, please bend the copper wire as shown in figure 2 and insert it into the corresponding port.
3. Then tighten the screws with a screwdriver and cover with silicone.




(Figure 1)

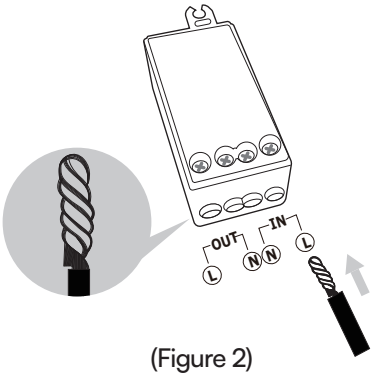

(Figure 2)



(Figure 3)

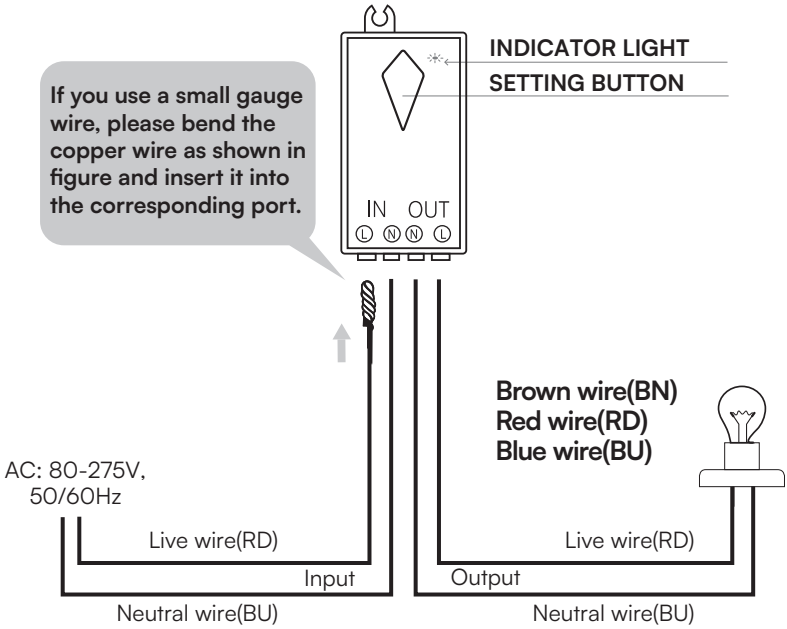


Note: Wires are not included with the product and must be purchased separately.

PAIRING WI-FI RECEIVER WITH V-TAC WIRELESS SWITCHES


You can also now connect V-TAC's Wi-Fi Receiver with V-TAC Wireless Switches (VT-5131, VT-5132, and VT-5133 & VT-5143). In order to pair the receiver with the switch. Please scan the QR code to access the pairing steps.

APP INSTALLATION

Step 1: Scan the given QR code, or download “Smart Life’ from the App Store (iOS) or the Google Play Store (Android).

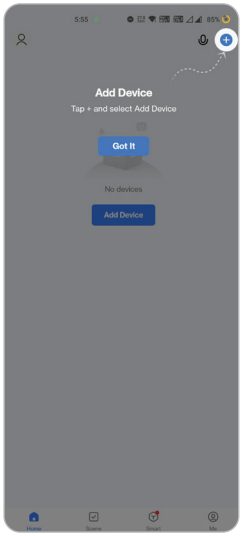

2. Enable Bluetooth and Home Wifi for the device to access your wifi connection for pairing

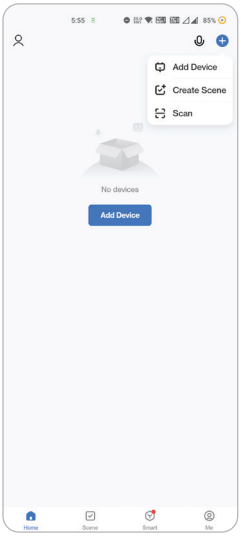

3. Click “Add a device” or “+” in the top right corner.




4. Click on the Lighting choose “Breaker (Wi-Fi)“


Step 5: To begin the pairing process, firstly tap and hold the wireless receiver for 5-7 seconds until it starts flashing Green light as shown in the below image.

Once the wireless receiver indicates with flashing Green light, it has been successfully connected in pairing mode. Tap on "confirm indicator is blinking rapidly" and enter the Wi-Fi username and password and tap on confirm. (Ensure Wi-Fi Frequency should be 2.4Ghz Only)


Troubleshooting: If the wireless receiver is flashing Red color, please wait for 30 - 60 seconds till the light disappears. Then follow the above process to connect the wireless receiver in pairing mode.

Note: Before starting the pairing process please ensure the wireless receiver is connected to a device and the power is switched ON.

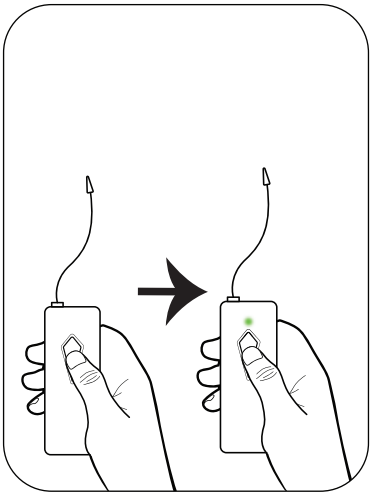


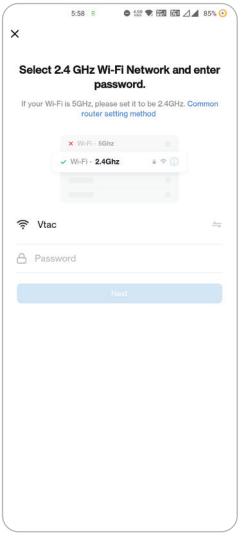


7. Select 2.4GHz Wi-Fi network and enter the password

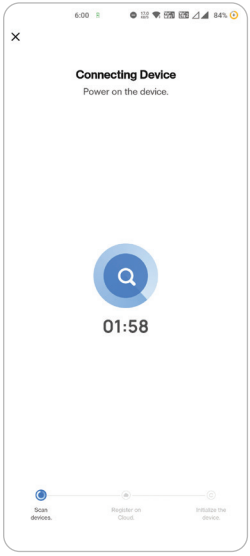

Step 9: Once you have successfully completed step 10, you will be redirected to below page, where the App searches, registers and initializ-es the device(lamp) (ref image below).

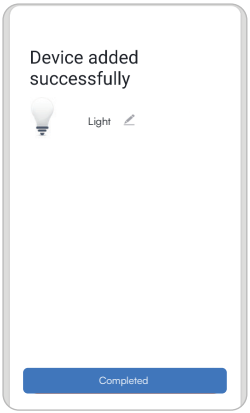


Step 10: Once your device is successfully added, rename the device to your preference.

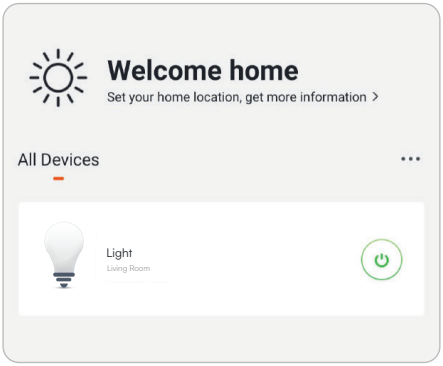


Step 11: You can now start controlling your device with the App. Tap the device name on the home page to enter the controls and features of the device.

Step 10: After successfully pairing the Wi-Fi receiver with the app, you can start controlling multiple features of the lamp through your mobile- on/off switch, timing & schedules, and more.




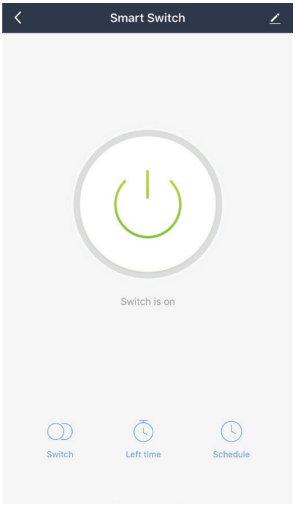

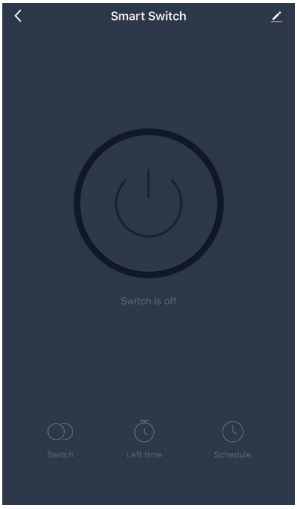


ALEXA SETTINGS


Step1:Install the Amazon Alexa app via the App Store(iOS) or the Play Store (Android) and register. If you already have an existing account with Amazon Alexa, please proceed to logging in.

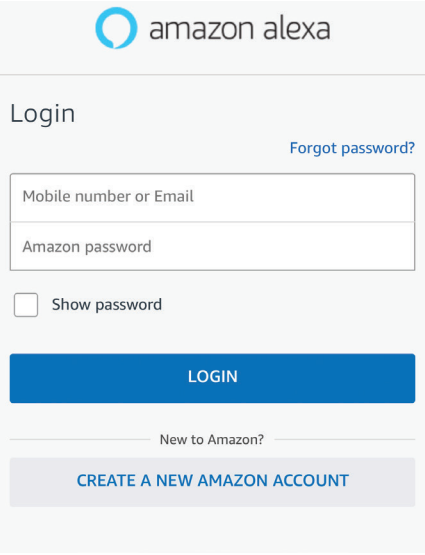

Step2: Once you are on the Amazon Alexa home page, tap on the lower right icon — where the arrow is pointed— to add a new device and skill.

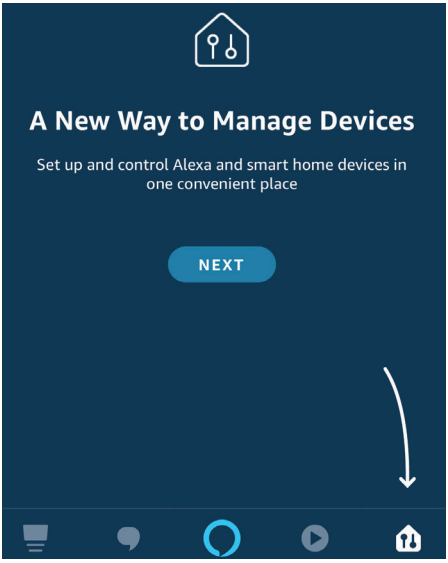


Step3: Tap on  **setings and tap on "skills and games" as shown below.**

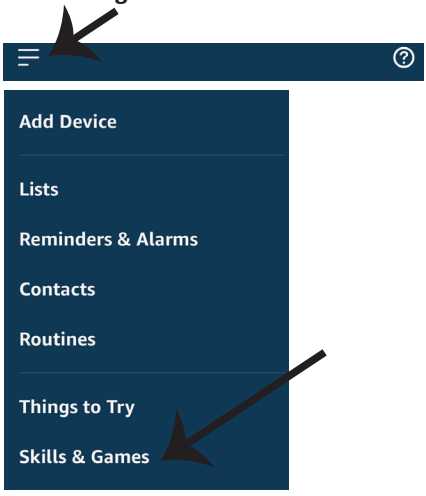


Step4: Search for 'Smart Life' on the "Skills & Games" page as shown below.




Step5: Enable the Skill.

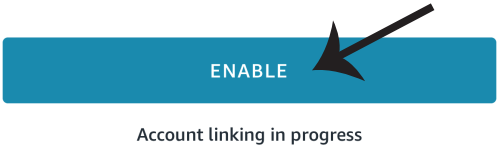


Step6: Enter your Smart Life login ID and password and tap on "Link Now"

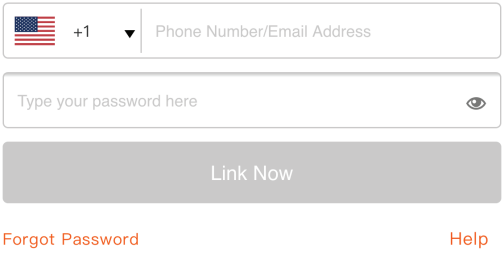

Step7: Once you tap on Link Now, you will be redirected to a new page requesting for authorization(Ref Image below). Tap on "Authorize"

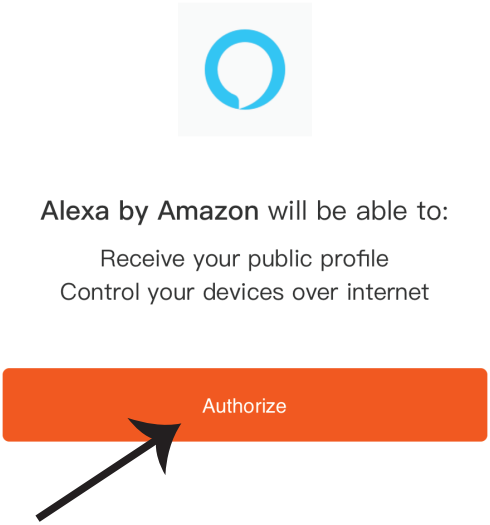



Step8: You will receive confirmation of the account being linked successfully (Ref Image below)

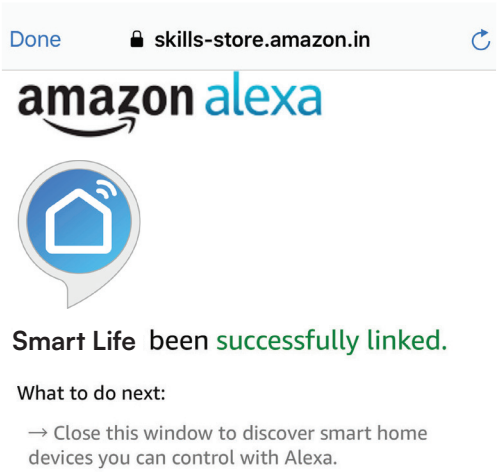

Step8: Discover your smart device on Alexa. Once you have enabled the skill
A) You can use voice command "Alexa discover devices" to the Alexa device which you have.

B) To add device manually on home page tap on and tap on Add device , select the device which you are adding and tap on discover device.

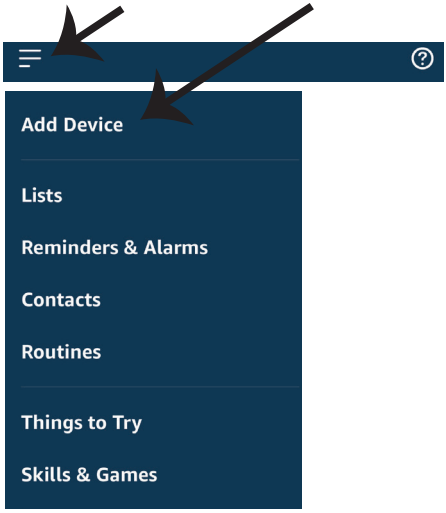

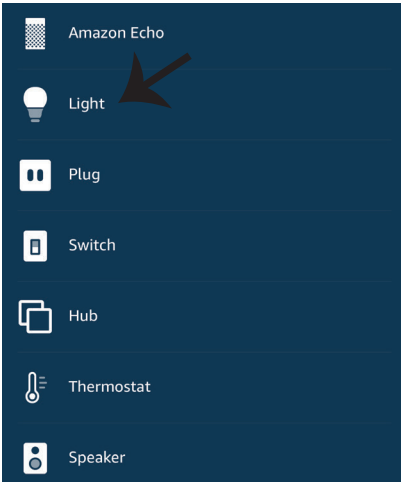

Note: Discovering the device must be done every time the device's name is changed on the app.

ALEXA Commands

Now, you can control your smart device using voice commands on Alexa. Below are a few commands you can use:

➢! *Alexa, turn on/off bedroom light.*

➢! *Alexa, set bedroom light to 50 percent.*

THINGS TO REMEMBER BEFORE STARTING INSTALLATION

1. Smart Life App & Amazon Alexa App

2. Make sure you have Amazon Alexa Device(including Echo, Echo Tap, or Echo Dot)


3. Smart Device - Lamp


4. Stable Wifi network

GOOGLE HOME SETTINGS


Step1:
a&b) Install the Google Home app via the App Store (iOS) or the Play Store (Android) and register. If you already have an existing account with Google Home, please proceed to logging in.
c) Create a New Home/Choose from the existing home if any.
d) Power ON the Google Home device and connect it to the App.(Then Proceed to step 2)




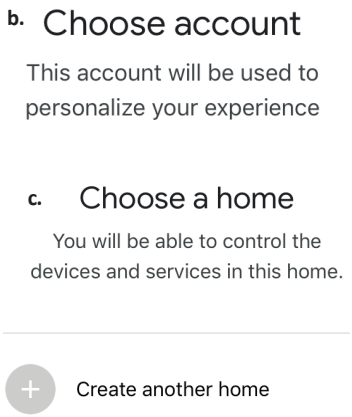




Step2: Once you are on the Google home page, tap on the Add "+" icon– to add a new device and skill. And then tap on Set up device as shown in below image.

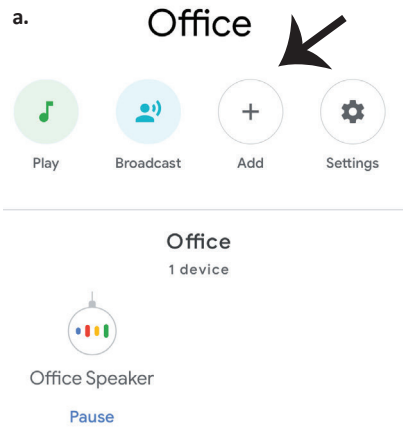


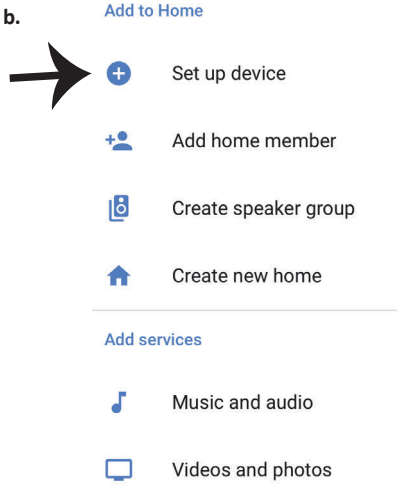


Step3: Make sure the Smart Bulb is paired with Smart Life app before starting step 3. Tap on the arrow section as highlighted in the below image.

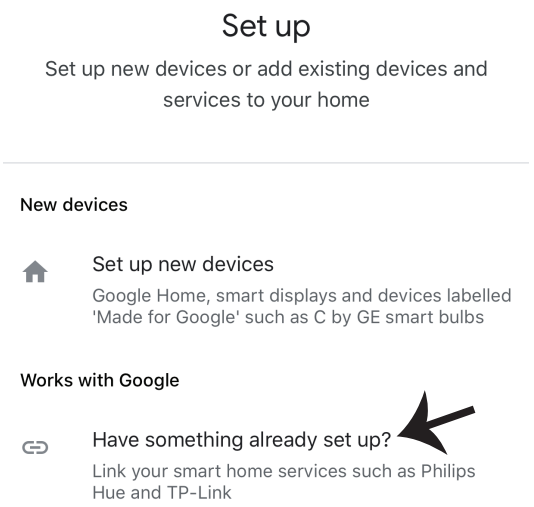


Step4: Type "Smart Life" on the search bar and tap on the icon of "Smart Life"

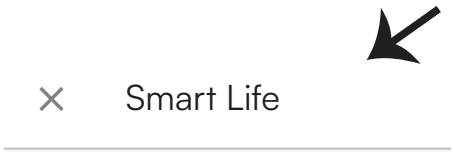

Step5: Sign In with your Smart Life Login credentials to Link the Smart Life device

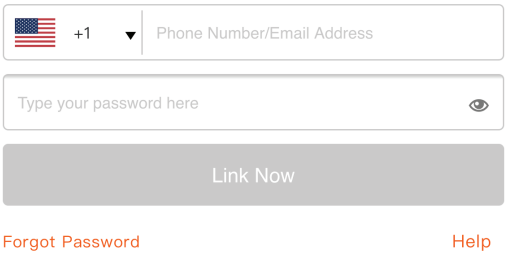

Step6: Tap on Authorize in order to proceed to linking the device.

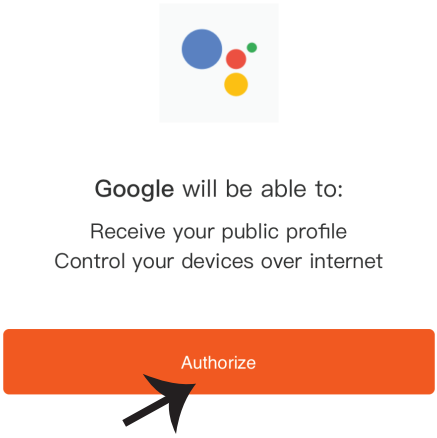

Step7

a. Account will now be linked, please stay on the page you will be redirected in few seconds to select the device to add to your home.


b. Select the device and tap on Next as show in image b.

a.




Account is now Linked


b.

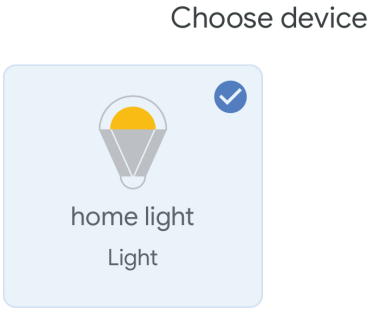

Step8: Select the Home where you would like to add the Smart Life under. (Or) you can create a New home in order to add the Smart Life to it.

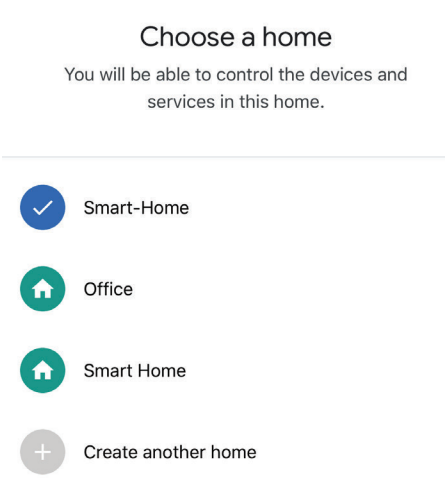


Step9: You have succesfully added Smart Life device to your Google home App.

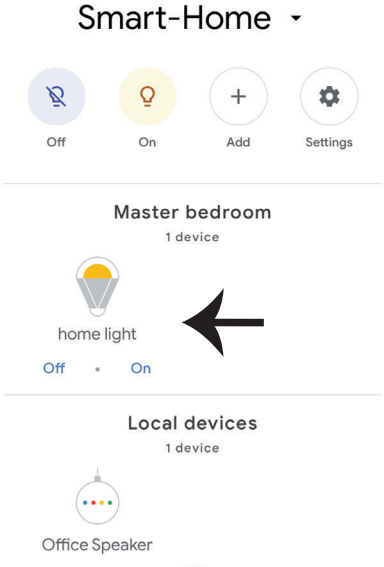


Step10:

a. You can turn the Lamp On/OFF by taping on On/Off options as shown below. (OR) You can tap on the Smart Lamp.

b. You will be redirected to page(as shown in image b) where you can control the lights "Power and Dimmingfunctionality".

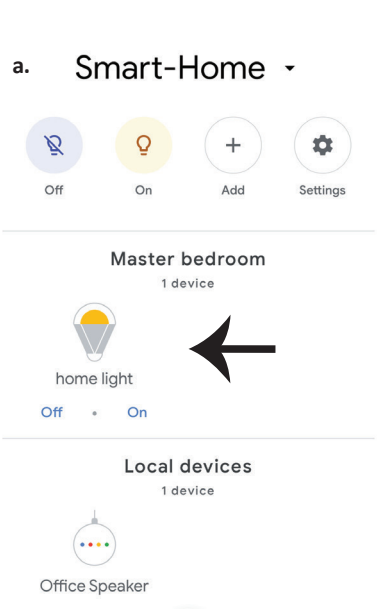

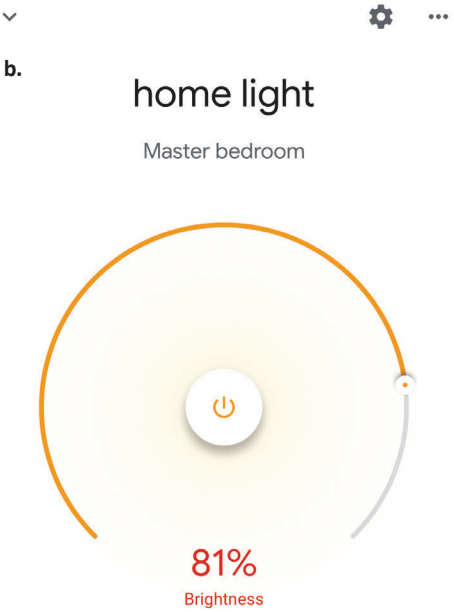

Google Commands:

Now, you can control your smart device using voice commands on Google Home. Below are a few commands you can use:

- ! *OK Google, turn on/off bedroom light.*
- ! *OK Google, set bedroom light to 50 percent.*

THINGS TO REMEMBER BEFORE STARTING INSTALLATION:

1. Smart Life App & Google Home App
2. Make sure you have Google Home Device
3. Smart Device - Lamp
4. Stable Wifi network